

# Reval 182

Medium Low Pressure Gas Regulator



**TECHNICAL BROCHURE**

**Pietro Fiorentini S.p.A.**

Via E.Fermi, 8/10 | 36057 Arcugnano, Italy | +39 0444 968 511  
sales@fiorentini.com

The data are not binding. We reserve the right  
to make changes without prior notice.

reval182\_technicalbrochure\_ENG\_revB

**[www.f Fiorentini.com](http://www.f Fiorentini.com)**

# Who we are

We are a global organization specialized in designing and manufacturing technologically advanced solutions for natural gas treatment, transmission and distribution systems.

We are the ideal partner for operators in the Oil & Gas sector, with a business offer that goes across the whole natural gas chain.

We are in constant evolution to meet our customers' highest expectations in terms of quality and reliability.

Our aim is to be a step ahead of the competition, with customized technologies and an after-sale service program undertaken with the highest grade of professionalism.



## Pietro Fiorentini advantages



Localised technical support





Experience since 1940



We operate in over 100 countries

# Area of Application

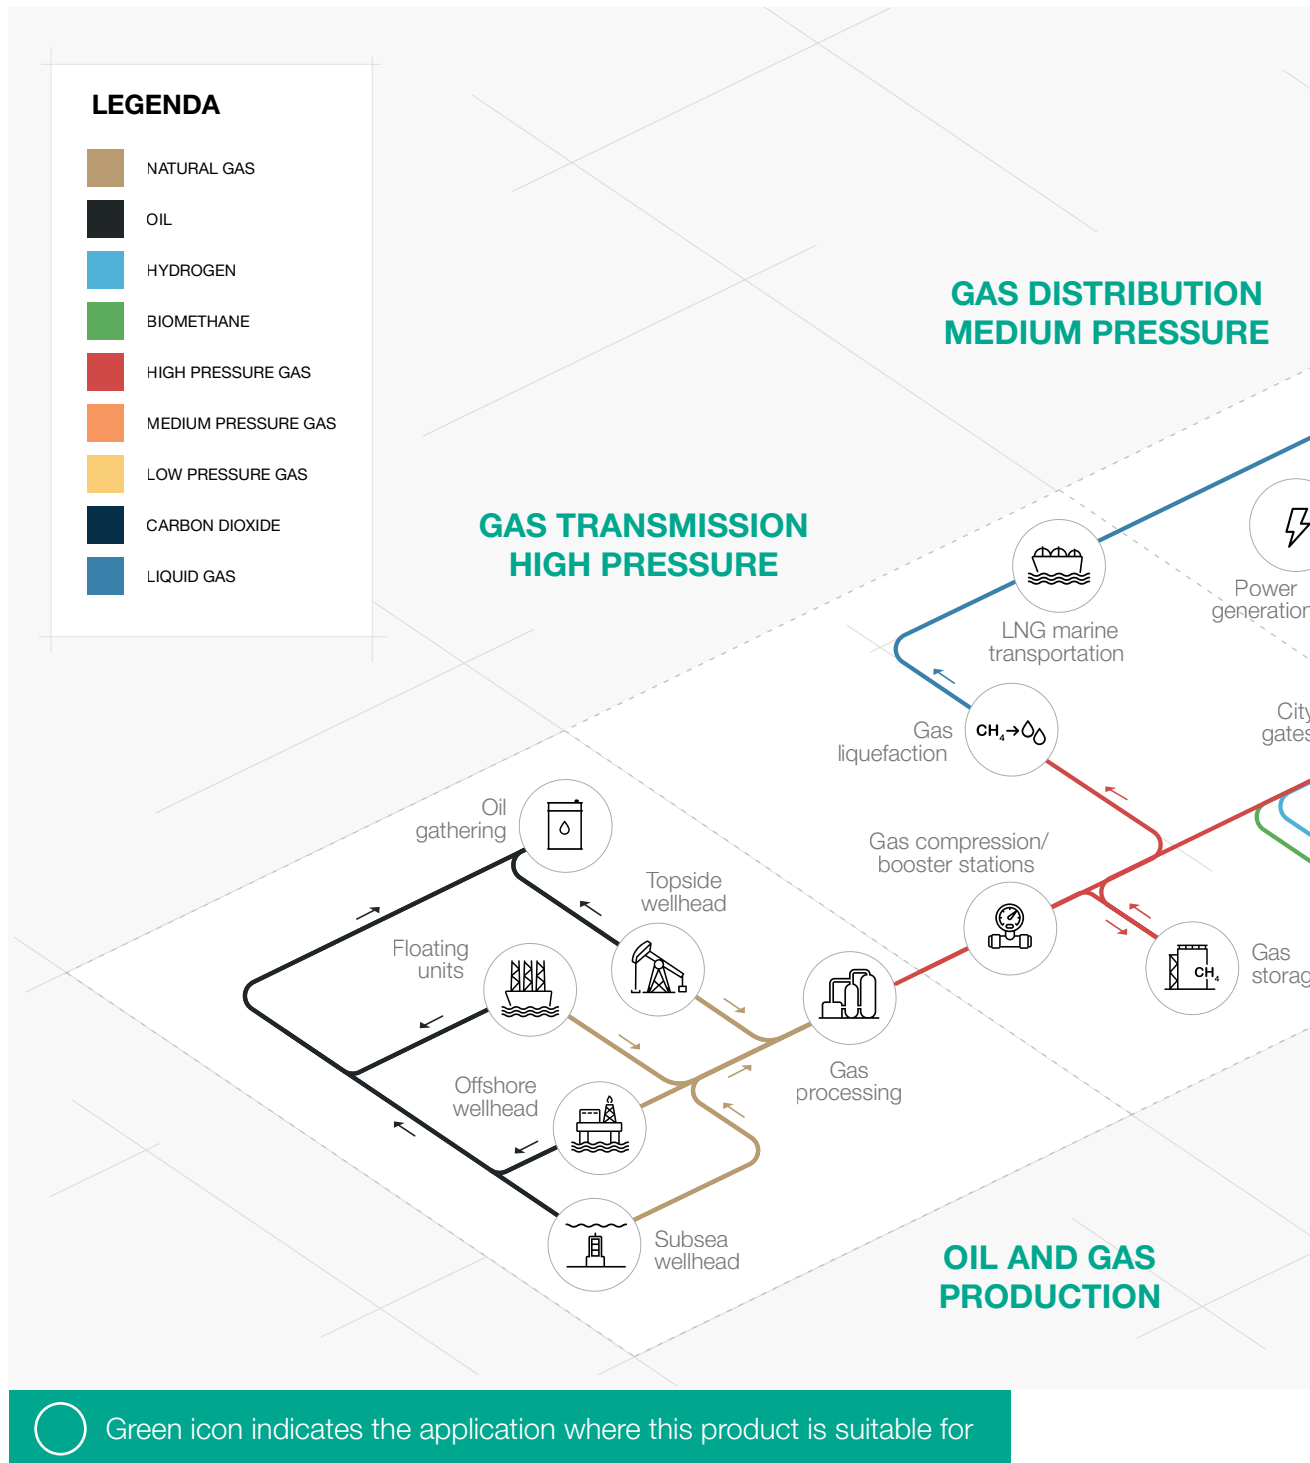

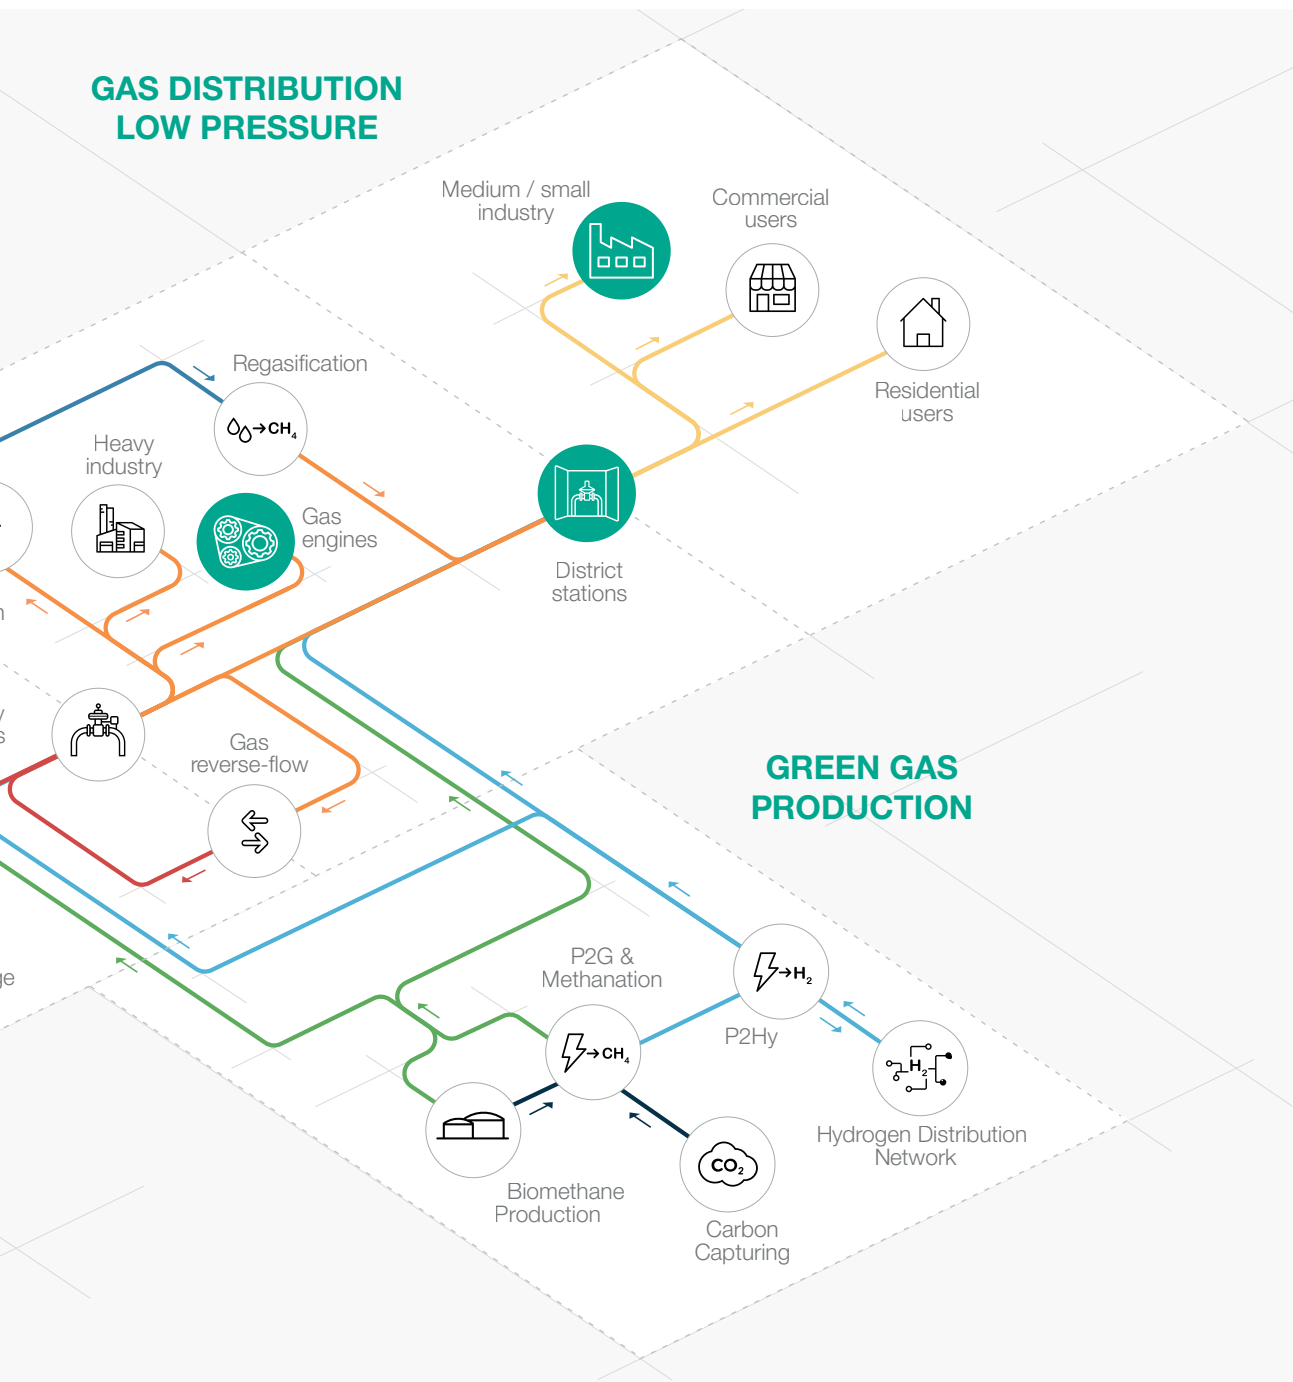


**Figure 1** Area of Application Map

# Introduction

**Reval 182** is one of the **pilot-operated gas pressure regulators** designed and manufactured by Pietro Fiorentini.

This device is suitable for use with previously filtered non-corrosive gases, and it is mainly used for medium and low pressure natural gas distribution networks.

According to the European Standard EN 334, it is classified as **Fail Close**.

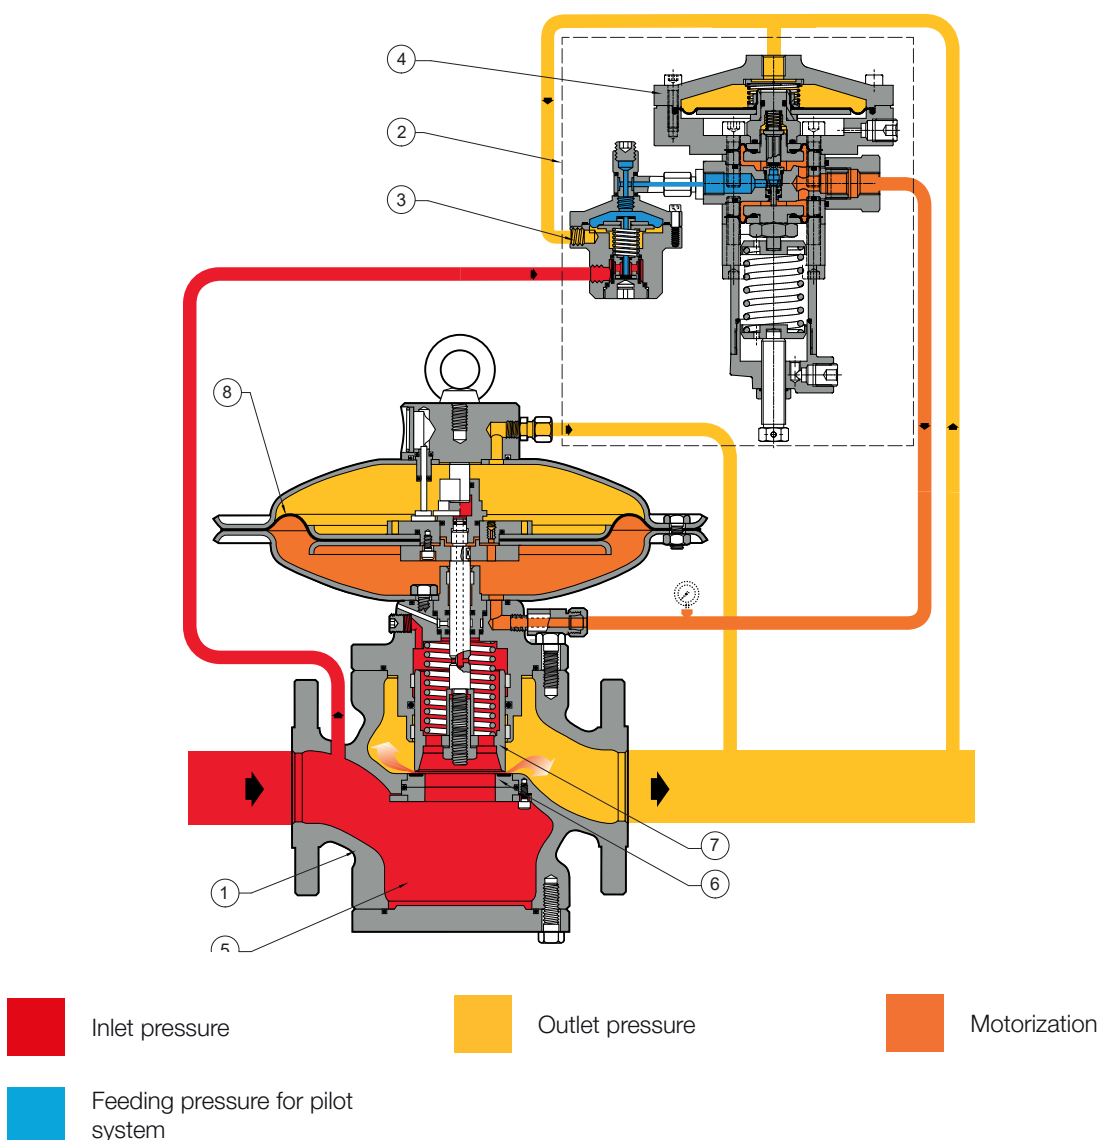

**Figure 2** Reval 182

# Features and Calibration ranges

**Reval 182** is a **pilot-operated** device for medium pressure and low pressure with a unique **dynamic balancing system** which ensures an **outstanding turn down ratio** combined with an extremely **accurate outlet pressure control**.


A balanced pressure regulator it is a pressure regulator where delivery pressure accuracy it is not affected by the fluctuation of the inlet pressure and flow during its operation. Therefore, a balance pressure regulator can have a single orifice for all pressure and flow operating conditions.

This regulator is suitable for use with previously filtered, non corrosive gases and distribution networks as well as high load industrial applications.


It is a **truly top entry design** which allows an **easy maintenance** of parts directly in the field **without removing the body from the pipework**.

Set point adjustment of the regulator is operated via a pilot unit used to load and unload the bleeding pressure from the top chamber.

The modular design of Reval 182 pressure regulators allows retrofitting of an emergency monitor PM/182, slam shut valve SB/82 or VB/93 and/or silencer DB/182 model on the same body.

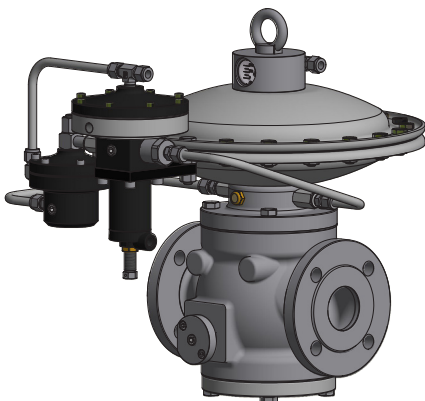

**Figure 3** Reval 182

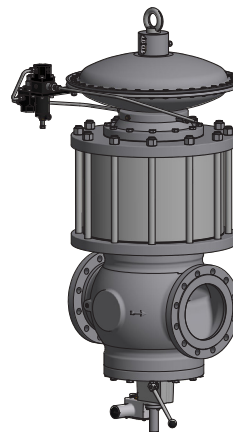

**Figure 4** Reval 182 with silencer DB/182 and SB/82

## Reval 182 competitive advantages



Compact and simple design



High accuracy



High turn-down ratio



Fail Close plug and seat regulator



Built-in pilot filter



Top Entry



Easy maintenance



Built-in accessories



Balanced type



Biomethane compatible and  
10% Hydrogen blending compatible.  
Higher blending available on request

## Features

Features	Values
Design pressure*	up to 2.5 MPa up to 25 barg
Ambient temperature*	from -20 °C to +60 °C from -4 °F to +140 °F
Inlet gas temperature range*	from -20 °C to +60 °C from -4 °F to +140 °F
Inlet pressure range bpu (MAOP)	from 0.02 to 2.5 MPa from 0.2 to 25 barg
Range of downstream pressure Wd	from 0.7 KPa to 1.2 MPa from 7 mbarg to 12 barg
Available Accessories	DB/182 Silencer, PM/182 Monitor, SB/82 Slam shut, SA Slam shut, HB/97 Slam shut, opening indicator
Minimum differential pressure	0.01 MPa   0.1 barg
Accuracy class AC	up to 2.5
Lock-up pressure class SG	up to 5
Nominal dimensions DN	DN 25 / 1"; DN 50 / 2"; DN 65 / 2" 1/2; DN 80 / 3"; DN 100 / 4"; DN 150 / 6"; DN 200 / 8"; DN 250 / 10"
Connections*	Class 150 RF or RTJ according to ASME B16.5 and PN16, 25 and 40 according to ISO 7005
(*) REMARK: Different functional features and/or extended temperature ranges available on request. Stated temperature ranges are the maximum for which the equipment's full performance, including accuracy, are fulfilled. Standard product may have a narrower range.	

**Table 1** Features



# Materials and Approvals

Part	Material
Body	Cast steel ASTM A216 WCB for all sizes Ductile iron GS 400-18 ISO 1083 for Size $\leq 8"$
Heads	Dye stamped carbon steel
Stem	AISI 416 Stainless steel
Plug	ASTM A 350 LF2 Nickel coated on sealing surfaces
Seat	Steel + vulcanized rubber
Diaphragm	Rubberized canvas
O-rings	Nitrile Rubber
Compression fittings	In zinc-plated carbon steel according to DIN 2353 Stainless steel on request

**REMARK:** The materials indicated above refer to the standard models. Different materials can be provided according to specific needs.

**Table 2** Materials

## Construction Standards and Approvals

**Reval 182** regulator is designed according to the European standard EN 334.  
The regulator reacts in closing (Fail Close) according to EN 334.

The product is certified according to European Directive 2014/68/EU (PED).  
Leakage class: bubble tight, better than VIII according to ANSI/FCI 70-3.



EN 334



PED-CE

# Pilot ranges and types

Type	Model	Operation	Range Wh		Spring Table web link
			MPa	barg	
Main pilot	201/A	Manual	0.0007 - 0.058	0.007 - 0.58	<a href="#">TT 475</a>
Main pilot	204/A	Manual	0.02 - 1.2	0.2 - 12	<a href="#">TT 433</a>

**Table 3** Settings table

Pilot adjustment	
Pilot type .../A	Manual setting
Pilot type .../D	Electric remote setting control
Pilot type .../CS	Pneumatic remote setting control
Pilot type .../FIO	Smart unit for remote setting, monitoring, flow limitation

**Table 4** Pilot adjustment table

General link to the calibration tables: [PRESS HERE](#) or use the QR code:



MAOP for regulators without incorporated slam shut												
Size (DN)	25   1"			50   2"			65   2" 1/2			80   3"		
mm	MPa   barg			MPa   barg			MPa   barg			MPa   barg		
S.150	SBR	1.9	19	SBR	1.9	19	SBR	1.9	19	SBR	1.9	19
	DBR	1.7	17	DBR	1.7	17	DBR	1.7	17	DBR	1.7	17
	CHR	1.6	16	CHR	1.6	16	CHR	1.6	16	CHR	1.6	16
	SAR	1.9	19	SAR	1.9	19	SAR	1.9	19	SAR	1.9	19
	SBR	4	40	SBR	4	40	SBR	4	40	SBR	4	40
SBR = Steel Body Rating DBR = Ductile iron Body Rating CHR = Control Head Rating SAR = slam shut SA Rating SBR = slam shut SB Rating												

**Table 5**

# Accessories

## For the pressure regulators:

- Cg limiter
- Limit switches
- Position transmitter
- Silencer
- Slam shut valve
- Monitor

## For the pilot circuit:

- Supplementary filter CF14 or CF14/D


## In-line Monitor

The in-line monitor is generally installed **upstream** of the active regulator.

Although the function of the monitor regulator is different, the two regulators are virtually identical from the point of view of their mechanical components.

The only difference is that monitor is set at a higher pressure than active regulator.

The Cg coefficients of the worker regulator with an in-line monitor is the same, but during worker regulator sizing it shall be considered the differential pressure drop generated by the fully open in-line monitor. As a practice, to incorporate this effect a Cg reduction of 20% of the worker regulator can be applied.

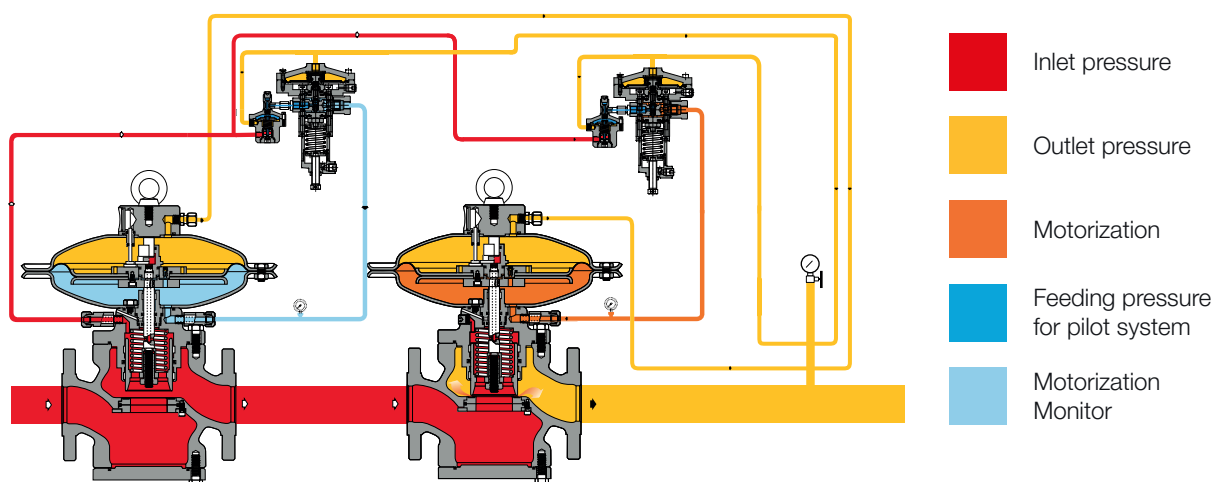

**Figure 5** Reval 182 in-line monitor

## Monitor PM/182

**This emergency regulator (monitor) is directly integrated** onto the body of the main regulator. Both pressure regulators, therefore, use the same valve body, although they have independent actuators, pilots and valve seats.









The monitor is normally in fully open position during normal operation of the active regulator and takes over on in the event of its failure.


The operational characteristics of the PM/182 monitor are the same as for the Reval 182 regulator.

The Cg coefficients of regulator having an incorporated monitor is 5% lower than those for standard version.

This solution allows the construction of reduction pressure lines with compact dimensions.

Another great advantage offered by the incorporated monitor regulator is that **it can be installed at any time**, even on an existing regulator, **without major changes to the pipework**.

-  Compact dimensions
-  Completely independent
-  "Fail to close" action
-  Built-in pilot filter
-  Visual opening indicator
-  Easy maintenance
-  Limit switch option
-  Accelerator option

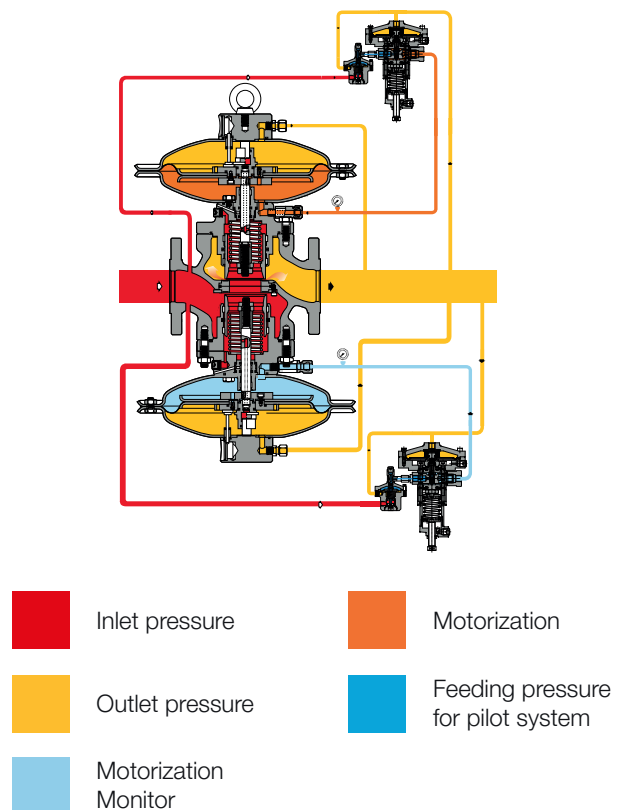

**Figure 6** Reval 182 with PM/182

Type	Model	Operation	Range Wh		Spring Table web link
			MPa	barg	
Main pilot	201/A	Manual	0.0007 - 0.058	0.007 - 0.58	<a href="#">TT 475</a>
Main pilot	204/A	Manual	0.02 - 1.2	0.2 - 12	<a href="#">TT 433</a>

**Table 6** Settings table

Types of pilot adjustment	
Pilot type .../A	Manual setting
Pilot type .../D	Electric remote setting control
Pilot type .../CS	Pneumatic remote setting control
Pilot type .../FIO	Smart unit for remote setting, monitoring, flow limitation

**Table 7** Pilot adjustment table

The monitor regulator can be equipped with an additional pilot called “accelerator” to enable a quick response time during the monitor take over. According to PED the accelerator is required on the monitor when acting as a safety accessory.

Type	Model	Operation	Range Wh		Spring Table web link
			MPa	barg	
Accelerator	V/25 BP	Manual	0.0015 – 0.02	0.015 – 0.2	<a href="#">TT 00601</a>
Accelerator	V/25 MP	Manual	0.02 – 0.06	0.2 – 0.6	<a href="#">TT 00601</a>
Accelerator	M/A	Manual	0.03 - 2	0.3 - 20	<a href="#">TT 354</a>

**Table 8** Accelerator adjustment table

General link to the calibration tables: [PRESS HERE](#) or use the QR code:



## Silencer DB/182

Whenever certain noise limit is desired, an additional silencer allows to considerably reduce the noise level (dBA).


The Reval 182 pressure regulator can be supplied with an **incorporated silencer** in either the standard version or version with incorporated slam shut or monitor regulator.

The high efficiency rely to the fact that noise absorption takes place at the same point where the noise is generated, thus preventing its propagation.

With the built-in silencer, the  $C_g$  valve coefficient is 5% lower than the corresponding version without.

Given the modular arrangement of the regulator, the silencer may be retrofitted to both standard Reval 182 version as well as those with incorporated slam shut or monitor, **without the need to modify the main piping.**


Pressure reduction and control operate the same manner as standard version.

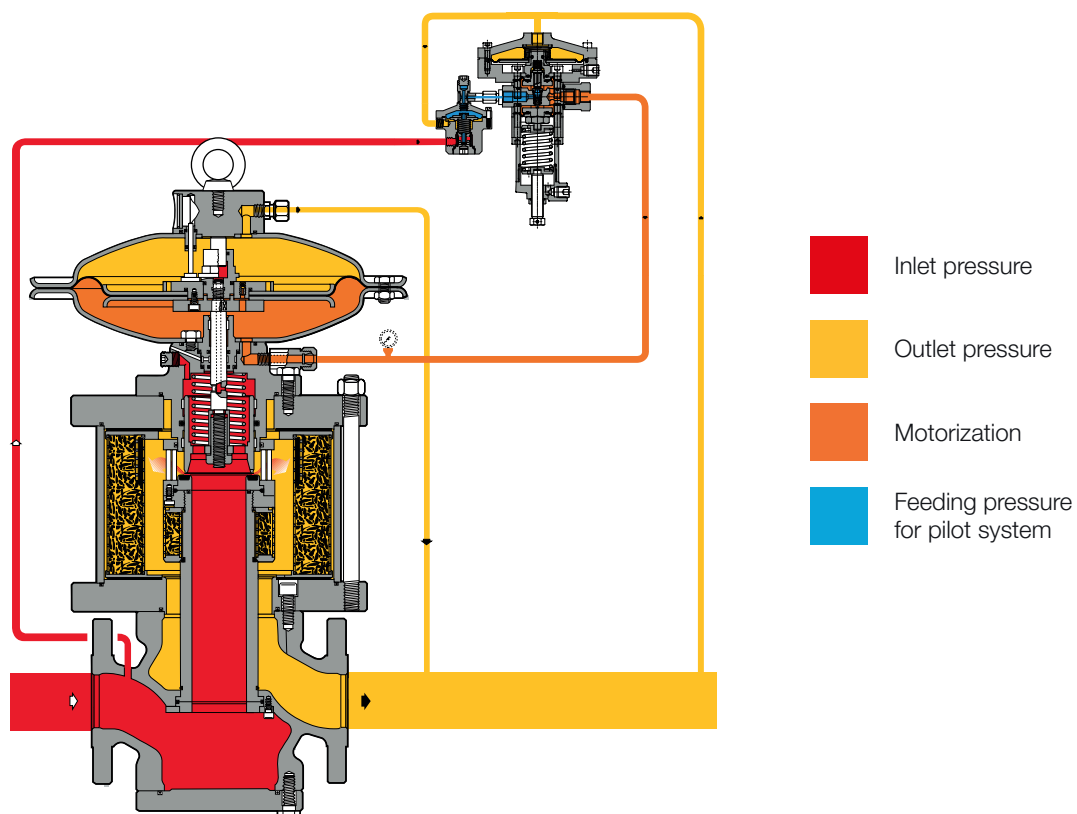

**Figure 7** Reval 182 with silencer DB/182

The chart below represents the silencer effectiveness based on some common reference conditions for 2", 3" and 4". For actual calculations at specific desired conditions please refer to the online sizing tool or contact your closest Pietro Fiorentini representative.

--- Pd 0.02 MPa | 0.2 barg NO Silencer      --- Pd 0.05 MPa | 0.5 barg NO SILENCER      --- Pd 0.2 MPa | 2 barg NO Silencer      ..... Recommended noise limit (85 dBA at 1 mt | 3 feet)  
 — Pd 0.02 MPa | 0.2 barg DB/182      — Pd 0.05 MPa | 0.5 barg DB/182      — Pd 0.2 MPa | 2 barg DB/182

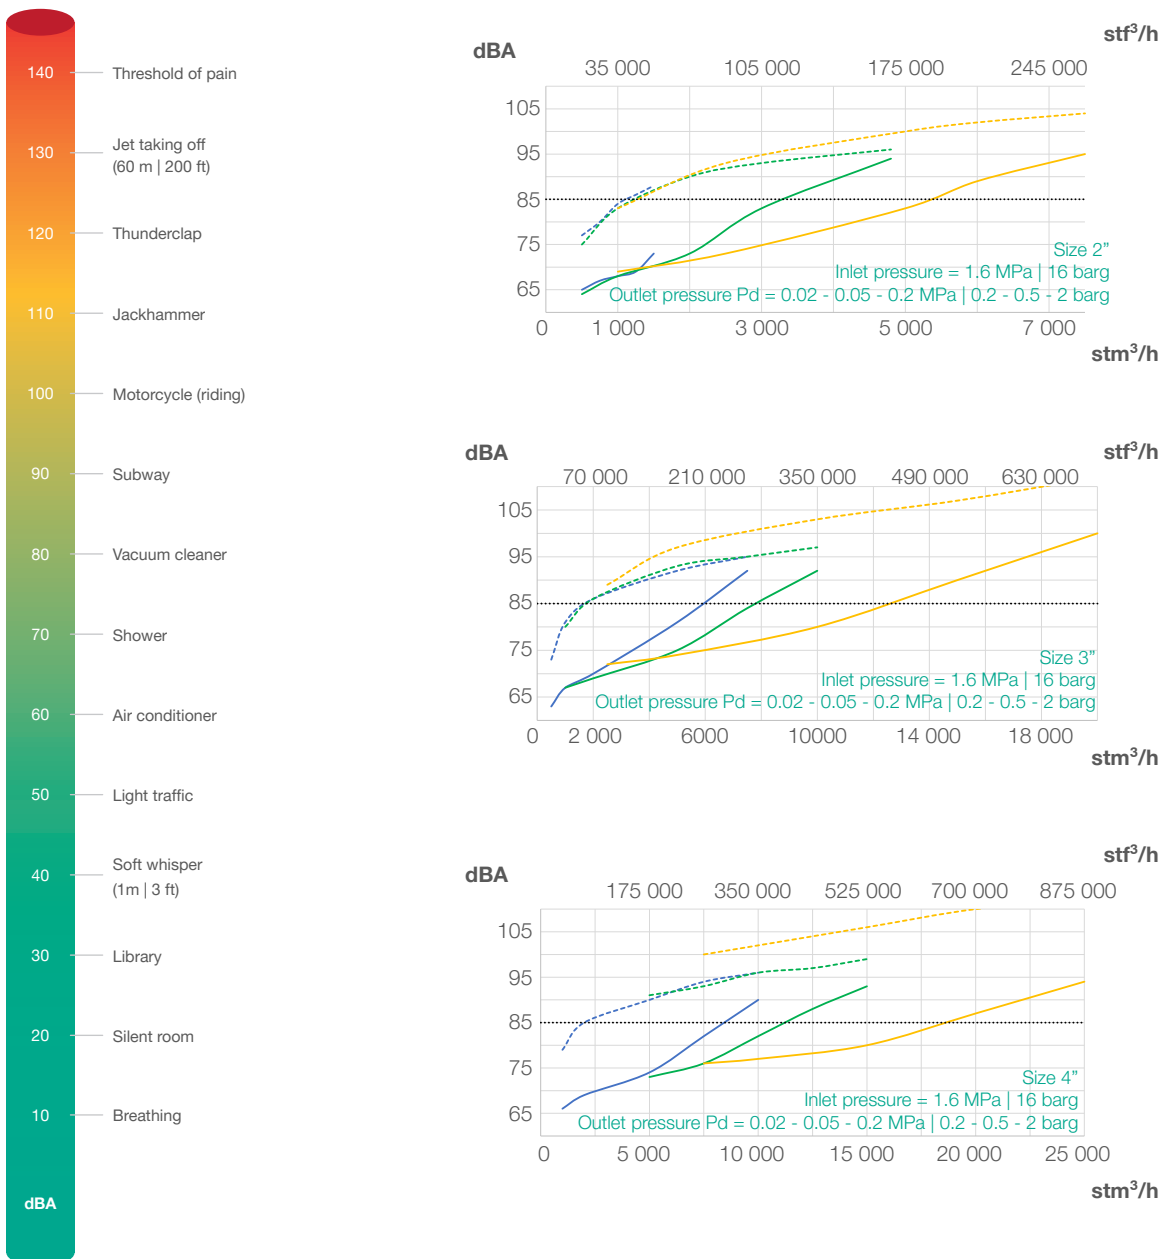

**Chart 1** Reval 182's silencer efficiency charts

## Slam Shut SA,SB/82 or HB/97









The Reval 182 pressure regulator offers the possibility of installing an **incorporated slam shut valve** SB/82, HB/97 or SA, depending on the regulator size, and this can be done either during the manufacturing process or be retrofitted in the field.


SB/82 is available for all sizes, while HB/97 is available from 4" only.  
SA is available up to 4".

**Retrofitting can be done without modifying** the pressure regulator assembly.


With the built-in slam shut, the Cg valve coefficients is 5% lower than the corresponding version without.

The main characteristics of this device are:


-  OPSO Over Pressure Shut-Off
-  UPSO Under Pressure Shut-Off
-  Internal by-pass
-  Push button for tripping test
-  Compact dimensions
-  Easy maintenance
-  Remote tripping option
-  Limit switch option

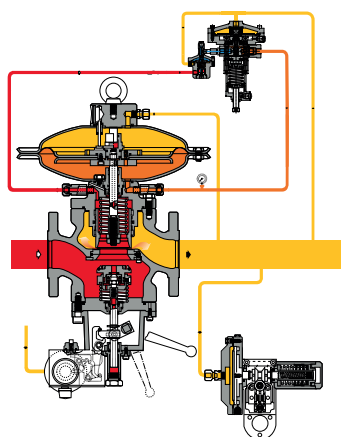

**Figure 8** Reval 182 with SB/82

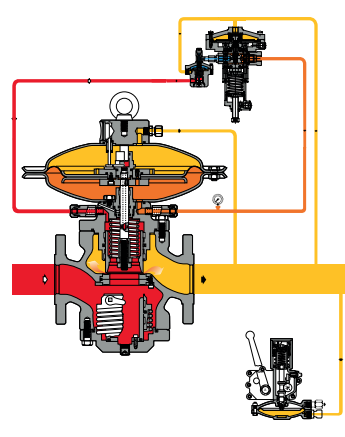

**Figure 9** Reval 182 with SA

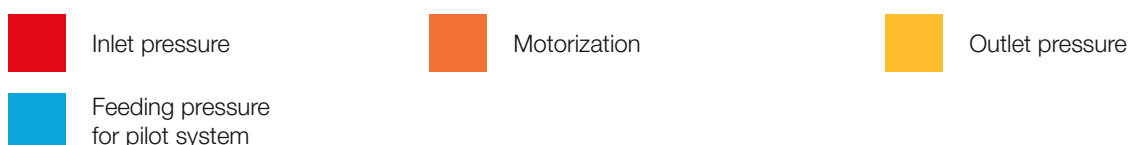




Pressure switch types and ranges					
SSV Type	Model	Operation	Range Wh		Spring Table web link
			KPa	mbarg	
SA	91	OPSO	2.5 - 110	25 - 1100	<a href="#">TT 1381</a>
		UPSO	1 - 90	10 - 900	
SA	92	OPSO	70 - 500	700 - 5000	<a href="#">TT 1381</a>
		UPSO	25 - 301	250 - 3010	
SSV Type	Model	Operation	Range Wh		Spring Table web link
			MPa	barg	
SA	93	OPSO	0.3 - 1.33	3 - 13.3	<a href="#">TT 1381</a>
		UPSO	0.08 - 0.77	0.8 - 7.7	
SB/82	102M	OPSO	0.02 - 0.55	0.2 - 5.5	<a href="#">TT 1331</a>
		UPSO	0.02 - 0.28	0.2 - 2.8	
SB/82	102MH	OPSO	0.02 - 0.55	0.2 - 5.5	<a href="#">TT 1331</a>
		UPSO	0.28 - 0.55	2.8 - 5.5	
SB/82	103M	OPSO	0.2 - 2.2	2 - 22	<a href="#">TT 1331</a>
		UPSO	0.02 - 0.8	0.2 - 8	
HB/97	103	OPSO	0.13 - 1.1	1.3 - 11	<a href="#">TT 984</a>
		UPSO	0.04 - 0.68	0.4 - 6.8	
HB/97	104	OPSO	1 - 3.15	10 - 31.5	<a href="#">TT 984</a>
		UPSO	0.1 - 2.06	1 - 20.6	

**Table 9** Settings table

# Weights and Dimensions

## Reval 182

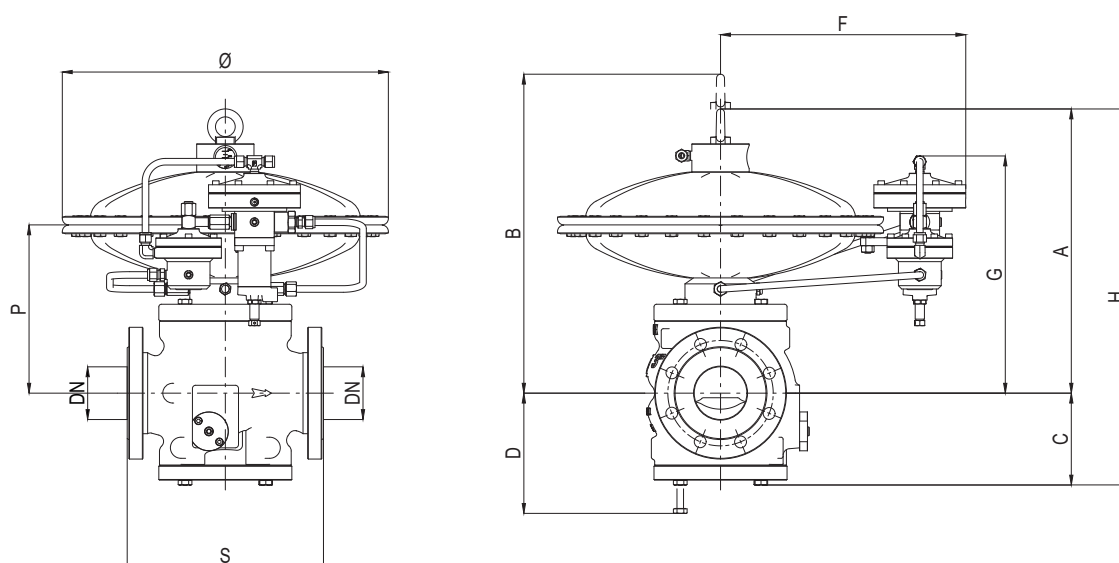

**Figure 10** Reval 182 dimensions


Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)

	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"	150   6"	200   8"	250   10"
S - ANSI 150/PN 16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	546   21.50"	673   26.50"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"	630   24.80"
A	320   12.60"	350   13.78"	430   16.93"	430   16.93"	470   18.50"	550   21.65"	650   25.60"	770   30.32"
B	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"	735   28.94"	850   33.46"	760   29.92"
C	100   3.94"	130   5.12"	140   5.51"	150   5.90"	190   7.48"	220   8.66"	260   10.24"	310   12.20"
D	130   5.12"	160   6.30"	180   7.08"	200   7.87"	250   9.84"	270   10.63"	315   12.40"	398   15.67"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"	470   18.50"
G	250   9.84"	285   11.22"	330   12.99"	340   13.36"	370   14.57"	400   15.75"	450   17.72"	550   21.65"
H	430   16.93"	480   18.90"	570   22.40"	580   22.83"	660   25.98"	770   30.31"	910   35.83"	1070   42.13"
P	170   6.70"	205   8.07"	250   9.84"	260   10.24"	290   11.42"	320   12.60"	370   14.57"	470   18.50"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)							

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	33   73	50   110	58   128	70   154	110   242	195   430	300   661	580   1279

**Table 10** Weights and dimensions

## Reval 182 + SB/82 or HB/97

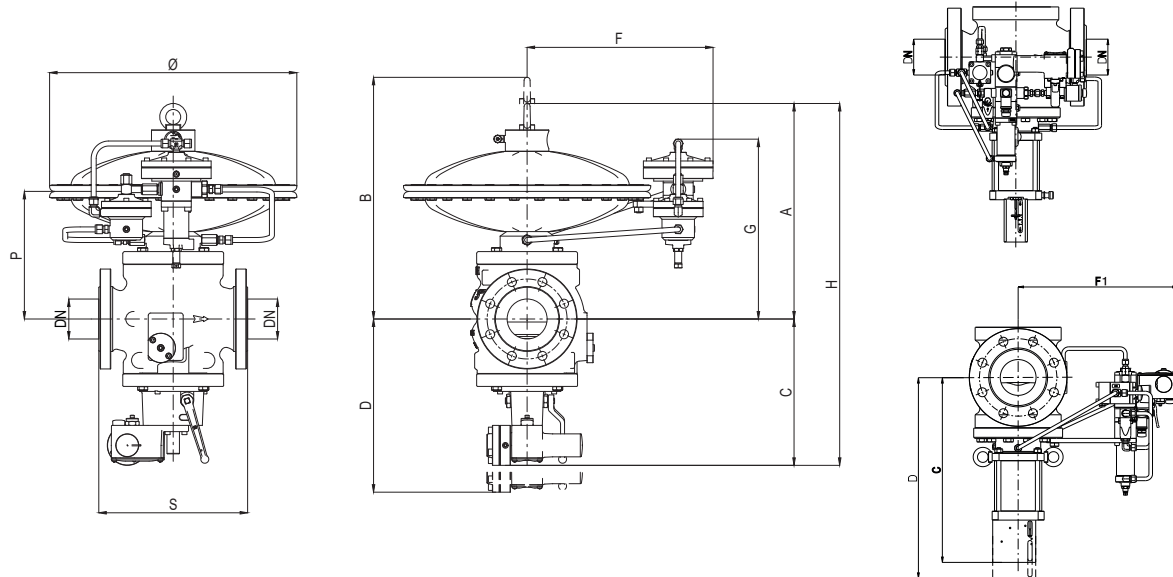


**Figure 11** Reval 182 + SB/82 or HB/97 dimensions

Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)								
Size (DN)	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
S - ANSI 150/PN16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	543   21.38"	673   26.50"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"	630   24.80"
A	320   12.60"	350   13.78"	430   16.93"	430   16.93"	470   18.50"	550   21.65"	650   25.60"	770   30.32"
B	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"	735   28.94"	850   33.46"	760   29.92"
C with SB/82	300   11.8"	300   11.8"	315   12.4"	335   13.19"	360   14.17"	430   16.93"	475   18.70"	550   21.65"
C with HB/97	-	-	-	-	518   20.39"	645   25.39"	687   27.05"	796   31.34"
D with SB/82	390   15.3"	390   15.35"	425   16.73"	445   17.52"	500   19.68"	615   24.21"	695   37.36"	800   31.50"
D with HB/97	-	-	-	-	650   25.59"	835   32.87"	900   35.43"	1060   41.7"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"	470   18.50"
F1	-	-	-	-	358   14.09"	410   16.14"	445   17.52"	510   20.08"
G	250   9.84"	285   11.22"	330   12.99"	340   13.36"	370   14.57"	400   15.75"	450   17.72"	550   21.65"
H with SB/82	620   24.41"	650   25.59"	745   29.33"	765   30.12"	830   32.68"	980   38.58"	1125   44.29"	1320   51.9"
H with HB/97	-	-	-	-	988   38.90"	1195   47.05"	1337   52.64"	1566   61.65"
P	170   6.70"	205   8.07"	250   9.84"	260   10.24"	290   11.42"	320   12.60"	370   14.57"	470   18.50"
Tubing Connections Øe 10 x Øi 8 (on request imperial sizing)								
Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16 with SB/82	45   99	56	70   154	88   194	132   291	246   542	354   780	680   1500
ANSI 150/PN 16 with HB/97	-	-	-	-	122   269	236   520	308   679	624   1376

**Table 11** Weights and dimensions

## Reval 182 + SA

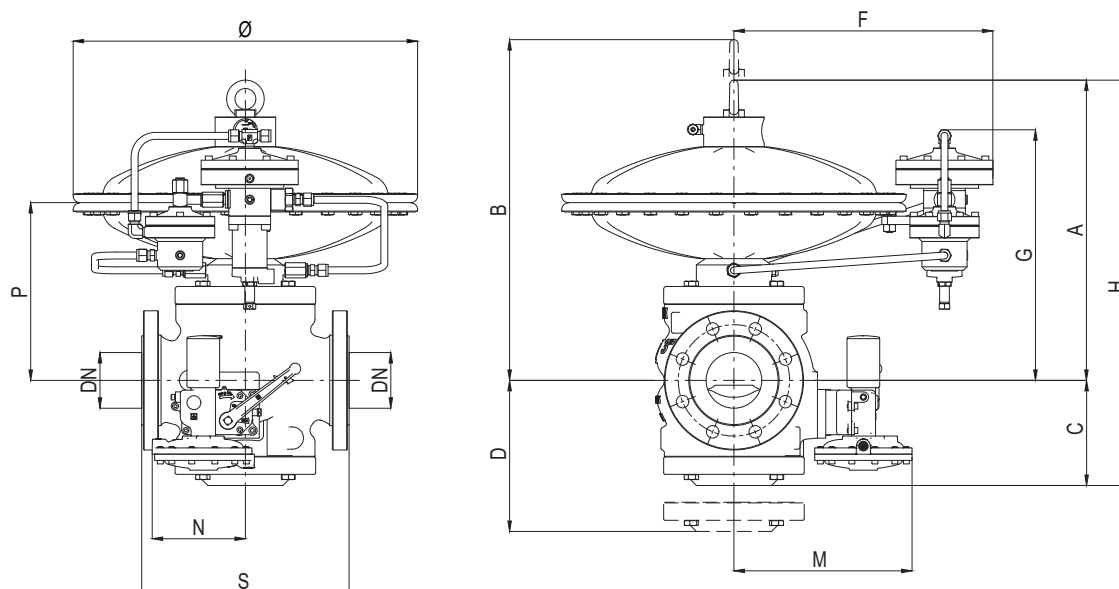**Figure 12** Reval 182 + SA dimensions


Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)

	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"
S - ANSI 150/PN16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"
A	320   12.60"	350   13.78"	430   16.93"	430   16.93"	470   18.50"
B	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"
C	145   5.71"	161   6.34"	178   7.01"	185   7.28"	404   15.91"
D	212   8.35"	255   10.04"	292   11.50"	322   12.68"	636   25.04"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"
G	250   9.84"	285   11.22"	330   12.99"	340   13.36"	370   14.57"
H	465   18.31"	511   20.12"	608   23.94"	615   24.21"	874   34.41"
P	170   6.70"	205   8.07"	250   9.84"	260   10.24"	290   11.42"
L	98   3.86"	146   5.75"	146   5.75"	146   5.75"	146   5.75"
M	194   7.64"	219   8.62"	232   9.13"	246   9.68"	263   10.35"
N	125   4.92"	125   4.92"	125   4.92"	125   4.92"	130   5.12"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)				

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	35   77	52   115	60   132	72   159	113   249

**Table 12** Weights and dimensions

## Reval 182 + PM/182

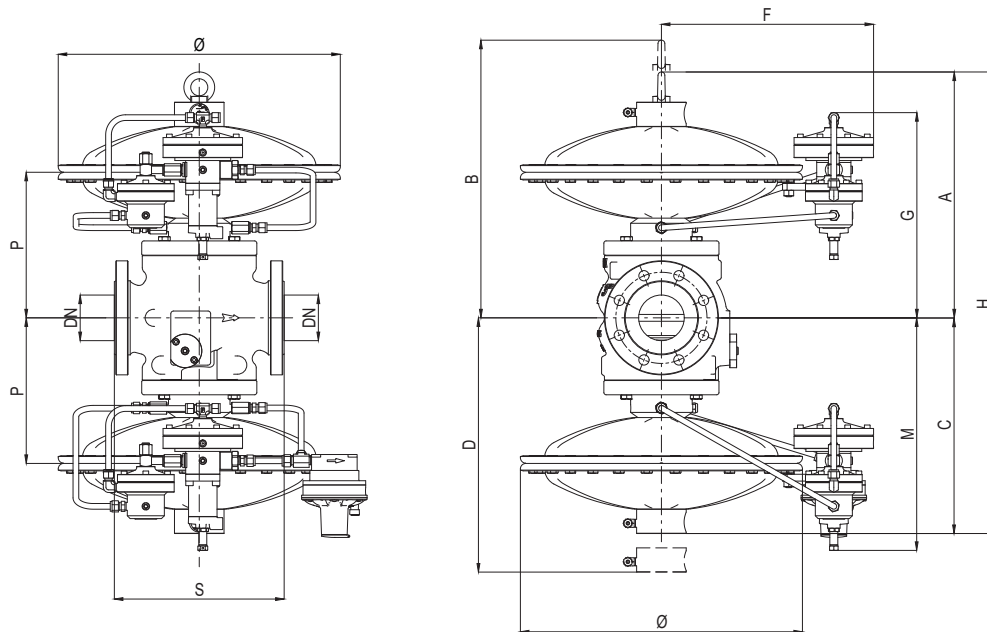

**Figure 13** Reval 182 + PM/182 dimensions


Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)

	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"	150   6"	200   8"
S - ANSI 150/PN 16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	543   21.38"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"
A	320   12.60"	350   13.78"	430   16.93"	430   16.93"	470   18.50"	550   21.65"	650   25.60"
B	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"	735   28.94"	850   33.46"
C	260   10.24"	290   11.42"	370   14.57"	380   14.96"	410   16.14"	490   19.29"	590   23.23"
D	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"	735   28.94"	850   33.46"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"
G	250   9.84"	285   11.22"	330   12.99"	340   13.36"	370   14.57"	400   15.75"	450   17.72"
H	640   25.20"	700   27.56"	860   33.86"	860   33.86"	940   37.01"	110   4.33"	1300   51.18"
P	170   6.70"	205   8.07"	250   9.84"	260   10.24"	290   11.42"	320   12.60"	370   14.57"
M	260   10.24"	295   11.61"	340   13.39"	350   13.78"	380   14.96"	410   16.14"	460   18.11"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)						

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	54   119	75   165	85   187	100   220	150   330	255   562	395   871

**Table 13** Weights and dimensions

## Reval 182 + DB/182

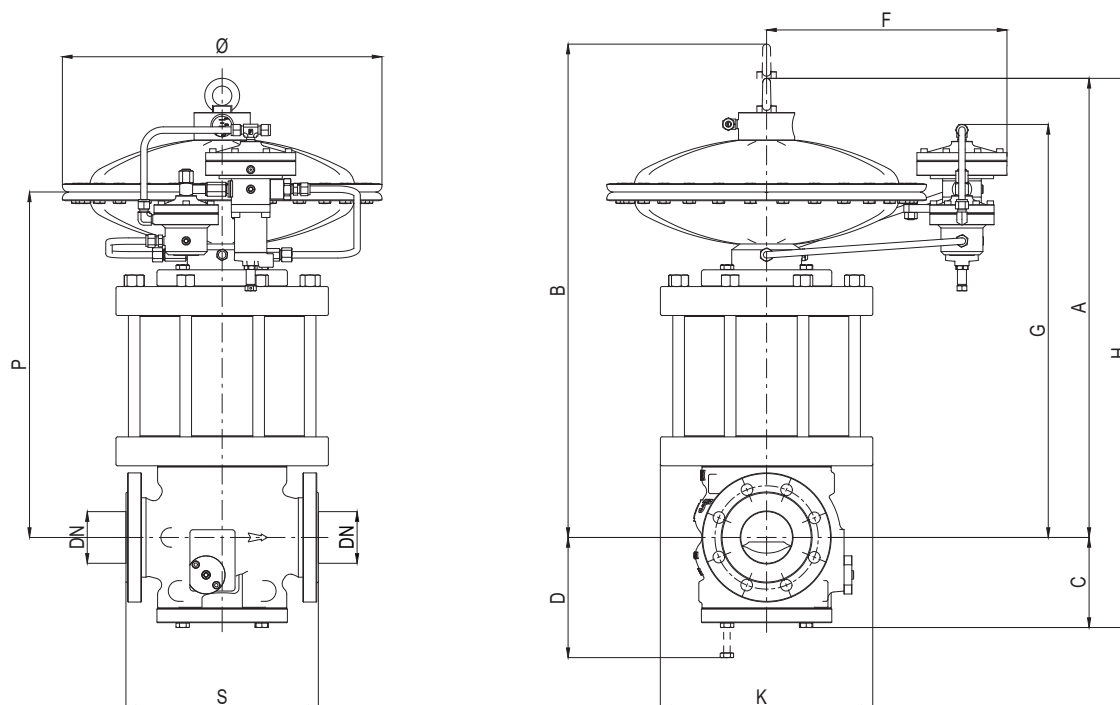**Figure 14** Reval 182 + DB/182 dimensions


Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)

	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"	150   6"	200   8"	250   10"
S - ANSI 150/PN 16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	543   21.38"	673   26.50"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"	630   24.80"
A	520   20.5"	550   21.7"	650   25.6"	675   26.6"	755   29.7"	920   36.2"	1050   41.3"	1262   50"
B	610   24"	640   25.2"	780   30.7"	785   30.9"	895   35.2"	1120   44"	1250   49.2"	1450   57"
C	100   3.94"	130   5.12"	140   5.51"	150   5.90"	190   7.48"	220   8.66"	260   10.24"	310   12.20"
D	130   5.12"	160   6.30"	180   7.08"	200   7.87"	250   9.84"	270   10.63"	315   12.40"	398   15.67"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"	470   18.50"
G	450   17.7"	480   18.9"	550   21.6"	585   23"	655   25.8"	770   30.3"	850   33.5"	1040   41"
H	820   32.3"	850   33.5"	965   38"	1010   39.8"	1115   44"	1350   53"	1525   60"	1575   62"
P	215   8.5"	295   11.6"	325   12.8"	325   12.8"	390   15.4"	470   18.5"	600   23.6"	960   38"
K	370   14.6"	400   15.7"	470   18.5"	505   19.9"	575   22.6"	690   27.2"	770   30.3"	700   27.6"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)							

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	44   97	84   185	88   194	112   247	178   392	339   747	536   1181	900   1984

**Table 14** Weights and dimensions

## Reval 182 + DB/182 + SB/82 or HB/97

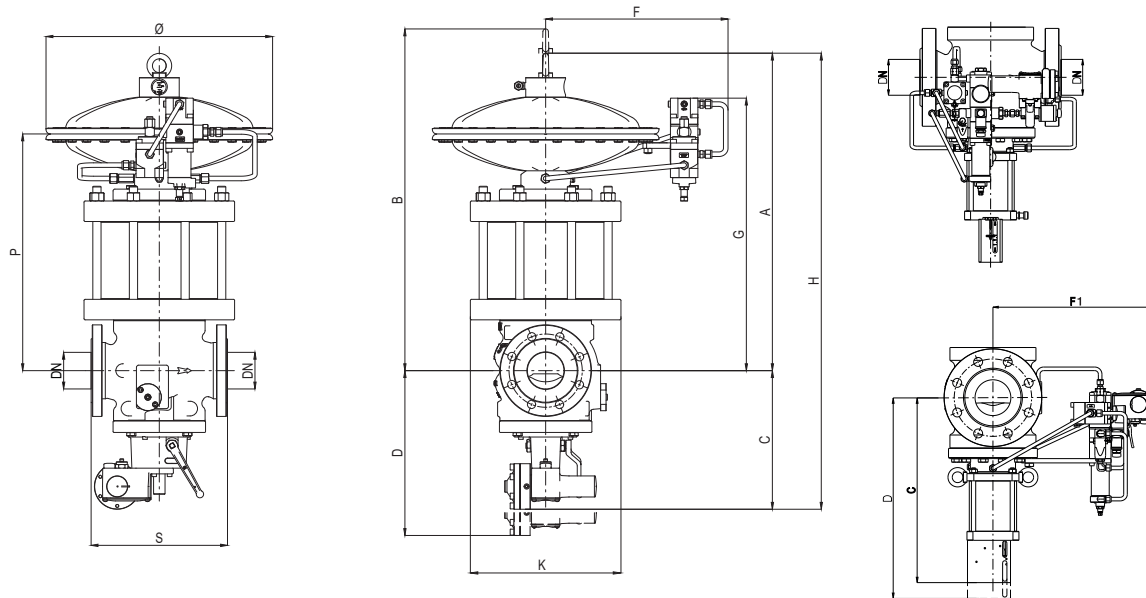

**Figure 15** Reval 182 + DB/182 + SB/82 or HB/97 dimensions


Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)								
Size (DN)	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
S - ANSI 150/PN16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	543   21.38"	673   26.50"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"	630   24.80"
A with SB/82	520   20.5"	550   21.7"	650   25.6"	675   26.6"	755   29.7"	920   36.2"	1050   41.3"	1262   50"
B with SB/82	610   24"	640   25.2"	780   30.7"	785   30.9"	895   35.2"	1120   44"	1250   49.2"	1450   57"
C with SB/82	300   11.8"	300   11.8"	315   12.4"	335   13.2"	360   14.2"	430   16.9"	475   18.7"	550   21.6"
C with HB/97	-	-	-	-	518   20.39"	645   25.39"	687   27.05"	796   31.34"
D with SB/82	390   15.3"	390   15.3"	425   16.7"	445   17.5"	500   19.7"	615   24.2"	695   27.4"	800   31.5"
D with HB/97	-	-	-	-	650   25.59"	835   32.87"	900   35.43"	1060   41.7"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"	470   18.50"
F1	-	-	-	-	358   14.09"	410   16.14"	445   17.52"	510   20.08"
G with SB/82	250   9.8"	480   18.9"	550   21.7"	585   23.03"	655   25.8"	770   30.3"	850   33.5"	1040   40.9"
H with SB/82	820   32.3"	850   33.5"	965   38"	1010   39.8"	1115   44"	1350   53"	1525   60"	1812   71"
H with HB/97	-	-	-	-	650   25.59"	835   32.87"	900   35.43"	1060   41.7"
P with SB/82	370   14.6"	400   15.7"	470   18.5"	505   19.9"	575   22.6"	690   27"	770   30.3"	700   27.5"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)							

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16 with SB/82	56   123	90   198	100   220	130   287	200   441	390   860	590   1301	1000   2205
ANSI150/PN 16 with HB/97	-	-	-	-	196   432	380   838	534   1177"	944   2081

**Table 15** Weights and dimensions

## Reval 182 + DB/182 + SA

**Figure 16** Reval 182 + DB/182 + SA dimensions

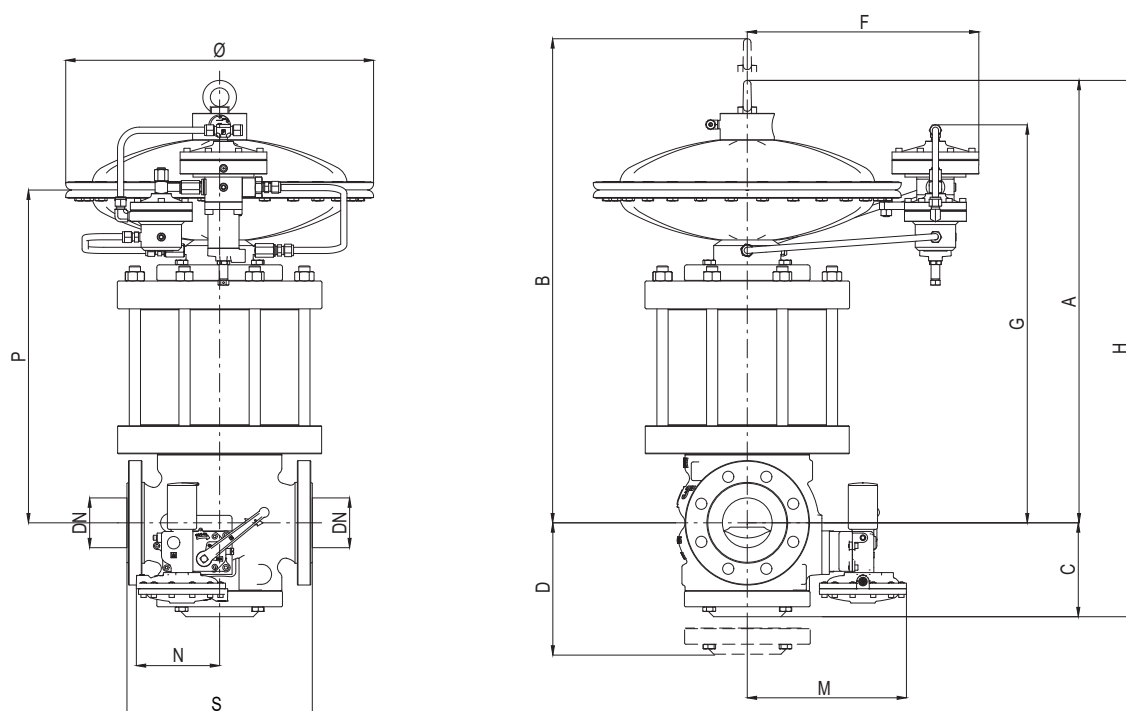
Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)					
	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"
S - ANSI 150/PN16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"
A	520   20.5"	550   21.7"	650   25.6"	675   26.6"	755   29.7"
B	610   24"	640   25.2"	780   30.7"	785   30.9"	895   35.2"
C	145   5.71"	161   6.34"	178   7.01"	185   7.28"	404   15.90"
D	212   8.35"	255   10.08"	292   11.50"	322   12.68"	636   25.04"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"
G	250   9.84"	480   18.90"	550   21.65"	585   23.03"	655   25.79"
H	465   18.31"	511   20.12"	608   23.94"	615   24.21"	874   34.41"
P	370   14.57"	400   15.75"	470   18.5"	505   19.88"	575   22.64"
L	98   3.86"	146   5.75"	146   5.75"	146   5.75"	146   5.75"
M	194   7.64"	219   8.62"	232   9.13"	246   9.68"	263   10.35"
N	125   4.92"	125   4.92"	125   4.92"	130   5.11"	130   5.11"
K	215   8.5"	295   11.6"	325   12.8"	325   12.8"	390   15.3"
Tubing Connections Øe 10 x Øi 8 (on request imperial sizing)					

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	35   77	52   115	60   132	72   159	113   249

**Table 16** Weights and dimensions



## Reval 182 + DB/182 + PM/182

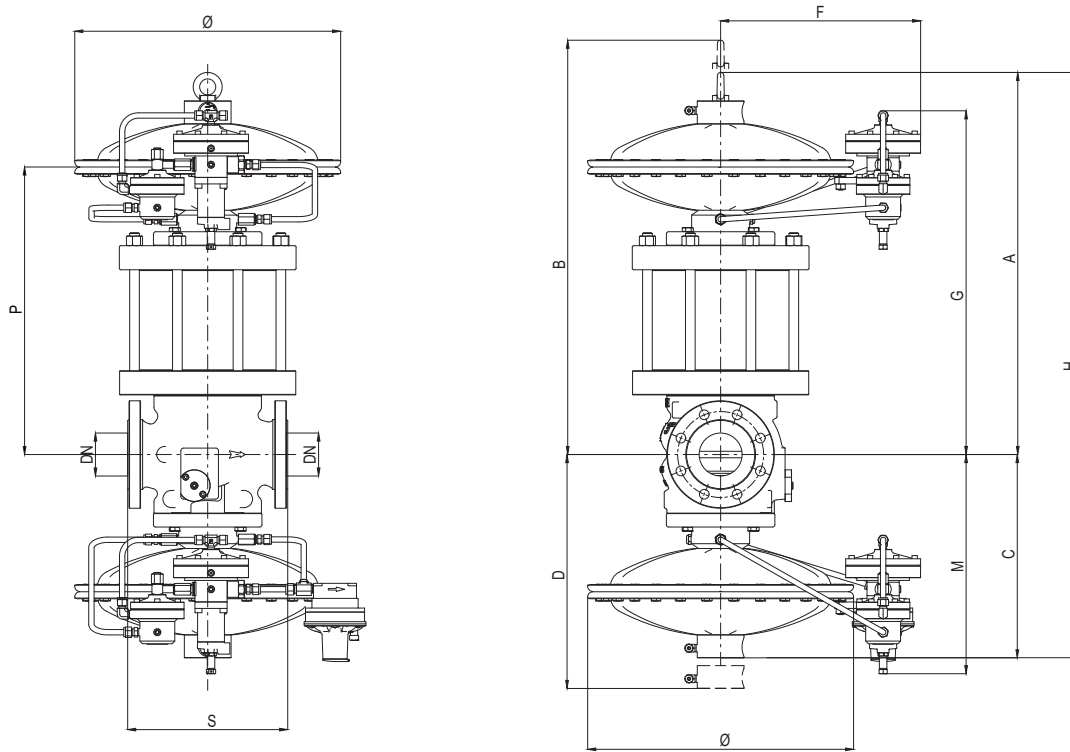

**Figure 17** Reval 182 + DB/182 + PM/182 dimensions

Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)							
	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches	[mm]   inches
Size (DN)	25   1"	50   2"	65   2" 1/2	80   3"	100   4"	150   6"	200   8"
S - ANSI 150/PN 16	183   7.20"	254   10"	276   10.87"	298   11.73"	352   13.86"	451   17.76"	543   21.38"
Ø	375   14.76"	375   14.76"	495   19.49"	495   19.49"	495   19.49"	630   24.80"	630   24.80"
A	520   20.5"	550   21.7"	650   25.6"	675   26.6"	755   29.7"	920   36.2"	1050   41.3"
B	610   24"	640   25.2"	780   30.7"	785   30.9"	895   35.2"	1120   44.1"	1250   49.2"
C	260   10.24"	290   11.42"	370   14.57"	380   14.96"	410   16.14"	490   19.29"	590   23.23"
D	410   16.14"	430   16.93"	530   20.87"	530   20.87"	600   23.62"	735   28.94"	850   33.46"
F	350   13.78"	350   13.78"	410   16.14"	410   16.14"	410   16.14"	475   18.70"	475   18.70"
G	450   17.7"	480   18.9"	550   21.7"	585   23"	655   25.8"	770   30.3"	850   33.5"
H	780   30.7"	840   33"	1020   40.1"	1055   41.5"	1165   45.8"	1410   55.5"	1640   64.6"
L	260   10.2"	295   11.6"	340   13.4"	350   13.8"	380   15"	410   16.1"	460   18.1"
P	370   14.6"	400   15.7"	470   18.5"	505   19.9"	575   22.6"	690   27.2"	770   30.3"
K	215   8.5"	295   11.6"	325   12.8"	325   12.8"	390   15.3"	470   18.5"	600   23.6"
Tubing Connections	Øe 10 x Øi 8 (on request imperial sizing)						

Weight	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs	Kg   lbs
ANSI 150/PN 16	65   143	109   240	115   254	142   313	218   480	399   880	631   1391

**Table 17** Weights and dimensions



# Sizing and Cg

In general, the choice of a regulator is made based on the calculation of the flow rate determined by the use of formulae using the flow rate coefficients (Cg) and the form factor (K1) as indicated by the EN 334 standard.

Flow rate coefficient								
Nominal size	25	50	65	80	100	150	200	250
Inches	1"	2"	2" 1/2	3"	4"	6"	8"	10"
Cg	575	2220	3320	4937	8000	16607	25933	36525
K1	106.78	106.78	106.78	106.78	106.78	106.78	106.78	106.78

**Table 18** Flow rate coefficient

For sizing [PRESS HERE](#) or use the QR code:



**Note:** In case you do not have the proper credentials to access, feel free to contact your closest Pietro Fiorentini representative.

In general the online sizing considers multiple variables as the regulator is installed in a system, enabling a better and multiperspective approach to the sizing.

For different gases, and for natural gas with a different relative density other than 0.61 (compared to air), the correction coefficients from the following formula shall be applied.

$$F_c = \sqrt{\frac{175,8}{S \times (273,16 + T)}}$$

S = relative density (refere to table 19)  
T = gas temperature ( °C )

### Correction Factor Fc

Gas Type	Relative Density S	Correction Factor Fc
Air	1.00	0.78
Propane	1.53	0.63
Butane	2.00	0.55
Nitrogen	0.97	0.79
Oxygen	1.14	0.73
Carbon Dioxide	1.52	0.63

Note: the table shows the Fc correction factors valid for Gas, calculated at a temperature of 15°C and at the declared relative density.

**Table 19** Correction Factor Fc

### Flow rate conversion

$$\text{Stm}^3/\text{h} \times 0.94795 = \text{Nm}^3/\text{h}$$

Nm<sup>3</sup>/h reference conditions T= 0 °C; P= 1 barg

Stm<sup>3</sup>/h reference conditions T= 15 °C; P= 1 barg

**Table 20** Flow rate conversion

### CAUTION:

In order to get optimal performance, to avoid premature erosion phenomena and to limit noise emissions, it is recommended to check that the gas speed at the outlet flange does not exceed the values of the graph below. The gas speed at the outlet flange may be calculated by means of the following formula:


$$V = 345.92 \times \frac{Q}{\text{DN}^2} \times \frac{1 - 0.002 \times \text{Pd}}{1 + \text{Pd}}$$

V = gas speed in m/s

Q = gas flow rate in Stm<sup>3</sup>/h

DN = nominal size of regular in mm

Pd = outlet pressure in barg

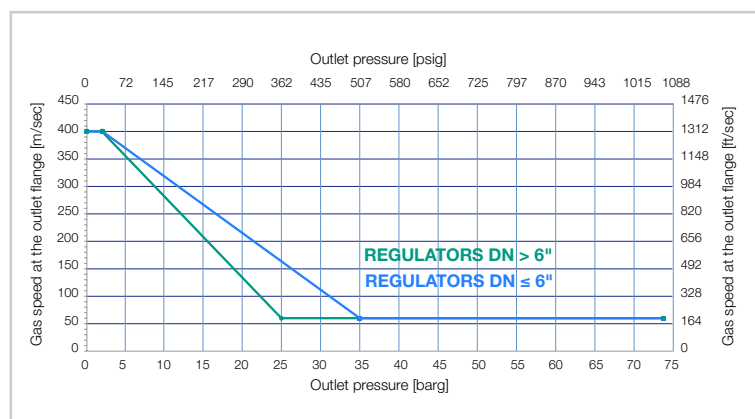



Sizing of regulators is usually made based on valve Cg value (table 18).

Flow rates at fully open position and various operating conditions are related by the following formulae where:

Q = flow rate in Stm<sup>3</sup>/h

Pu = inlet pressure in bar (abs)

Pd = outlet pressure in bar (abs).

- **A** > when the Cg value of the regulator is known, as well as Pu and Pd, the flow rate can be calculated as follows:

- **A-1** in sub critical conditions: (Pu < 2 x Pd)

$$Q = 0.526 \times C_g \times P_u \times \sin \left( K_1 \times \sqrt{\frac{P_u - P_d}{P_u}} \right)$$

- **A-2** in critical conditions: (Pu ≥ 2 x Pd)

$$Q = 0.526 \times C_g \times P_u$$

- **B** > vice versa, when the values of Pu, Pd and Q are known, the Cg value, and hence the regulator size, may be calculated using:

- **B-1** in sub-critical conditions: (Pu < 2 x Pd)

$$C_g = \frac{Q}{0.526 \times P_u \times \sin \left( K_1 \times \sqrt{\frac{P_u - P_d}{P_u}} \right)}$$

- **B-2** in critical conditions (Pu ≥ 2 x Pd)

$$C_g = \frac{Q}{0.526 \times P_u}$$

**NOTE:** The sin value is understood to be DEG.

# Customer Centricity

Pietro Fiorentini is one of the main Italian international companies with high focus on product and service quality.

The main strategy is to create a stable long-term oriented relationship, putting the customer's needs first. Lean management and thinking and customer centricity are used to improve and maintain the highest level of customer experience.



## **Support**

One of Pietro Fiorentini's top priorities is to provide support to the client in all phases of project development, during installation, commissioning and operation. Pietro Fiorentini has developed a highly standardized intervention management system, which helps to facilitate the entire process and effectively archive all the interventions carried out, drawing on valuable information to improve the product and service. Many services are available remotely, avoiding long waiting times or expensive interventions.



## **Training**

Pietro Fiorentini offers training services available for both experienced operators and new users. The training is composed of the theoretical and the practical parts, and is designed, selected and prepared according to the level of use and the customer's need.



## **Customer Relation Management (CRM)**

The centrality of customer is one of the main missions and vision of Pietro Fiorentini. For this reason, Pietro Fiorentini has enhanced the customer relation management system. This enables to track every opportunity and request from Customer in one single point and make free the information flow.



# Sustainability

Here at Pietro Fiorentini, we believe in a world capable of improvement through technologies and solutions that can shape a more sustainable future. That is why respect for people, society and the environment form the cornerstones of our strategy.



## Our commitment to the world of tomorrow

While in the past we limited ourselves to providing products, systems and services for the oil & gas sector, today we want to broaden our horizons and create technologies and solutions for a digital and sustainable world, with a particular focus on renewable energy projects to help make the most of our planet's resources and create a future in which the younger generations can grow and prosper.

The time has come to put the why we operate before the what and how we do it.







# Pietro Fiorentini

**TB0015ENG**



The data are not binding. We reserve the right  
to make changes without prior notice.

reval182\_technicalbrochure\_ENG\_revB

**[www.fiorentini.com](http://www.fiorentini.com)**