


SBC 782

Slam shut valves

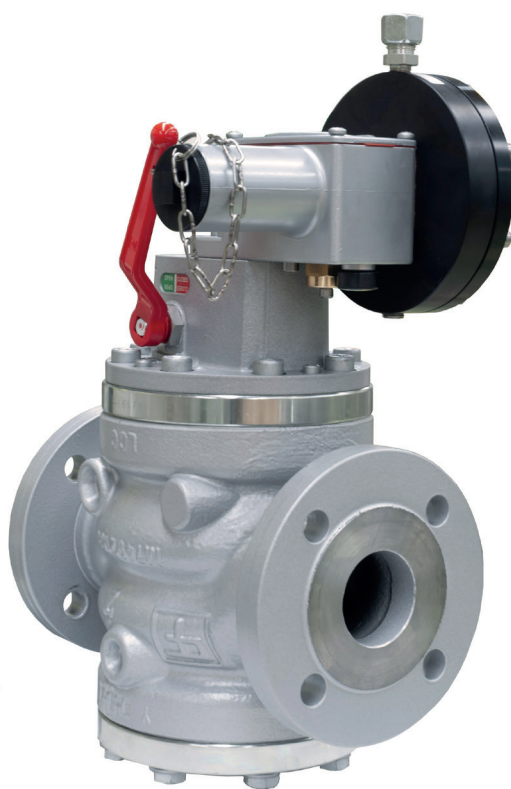

TECHNICAL BROCHURE

Pietro Fiorentini USA Inc.

606 Park Drive | Weirton, WV 26062, United States of America | +1 304 232 9115
fio.westvirginia@fiorentini.com

Pietro Fiorentini S.p.A.

Via E.Fermi, 8/10 | 36057 Arcugnano, Italy | +39 0444 968 511
sales@fiorentini.com

The data is not binding. We reserve the right
to make changes without prior notice.

sbc782_technicalbrochure_USA_revB

Who we are

We are a global organization that specializes in designing and manufacturing technologically advanced solutions for natural gas treatment, transmission and distribution systems.

We are the ideal partner for operators in the Oil & Gas sector, with a business solutions that span the whole natural gas chain.

We are constantly evolving to meet our customers' highest expectations in terms of quality and reliability.

Our aim is to be a step ahead of the competition, with customized technologies and an after-sale service program undertaken with the highest level of professionalism.



Pietro Fiorentini advantages



Localized technical support



Experience since 1940




Operating in over 100 countries

Area of Application

LEGEND

	NATURAL GAS
	OIL
	HYDROGEN
	BIOMETHANE
	HIGH PRESSURE GAS
	MEDIUM PRESSURE GAS
	LOW PRESSURE GAS
	CARBON DIOXIDE
	LIQUID GAS

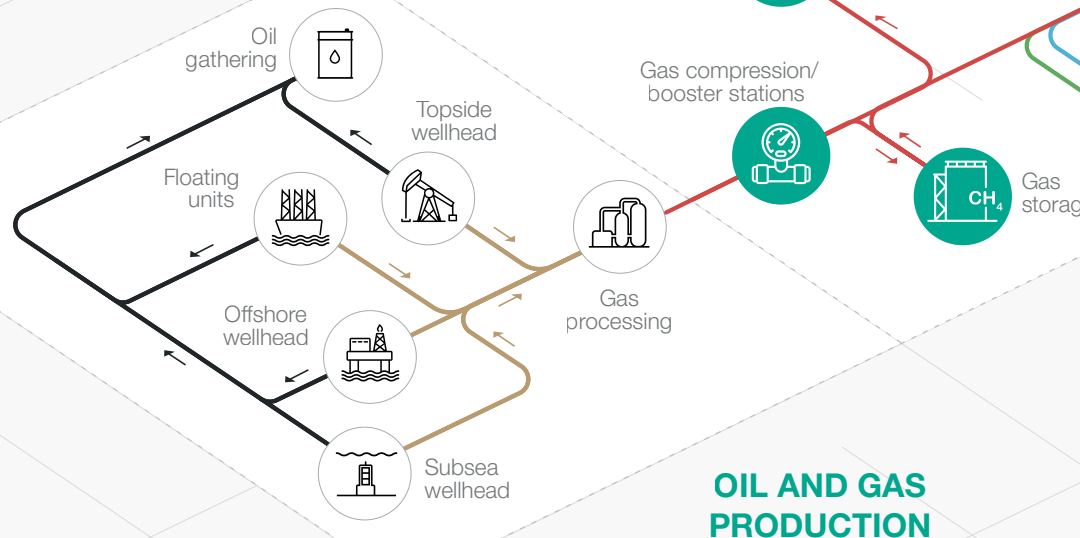

Green icon indicates the application where this product is suitable for

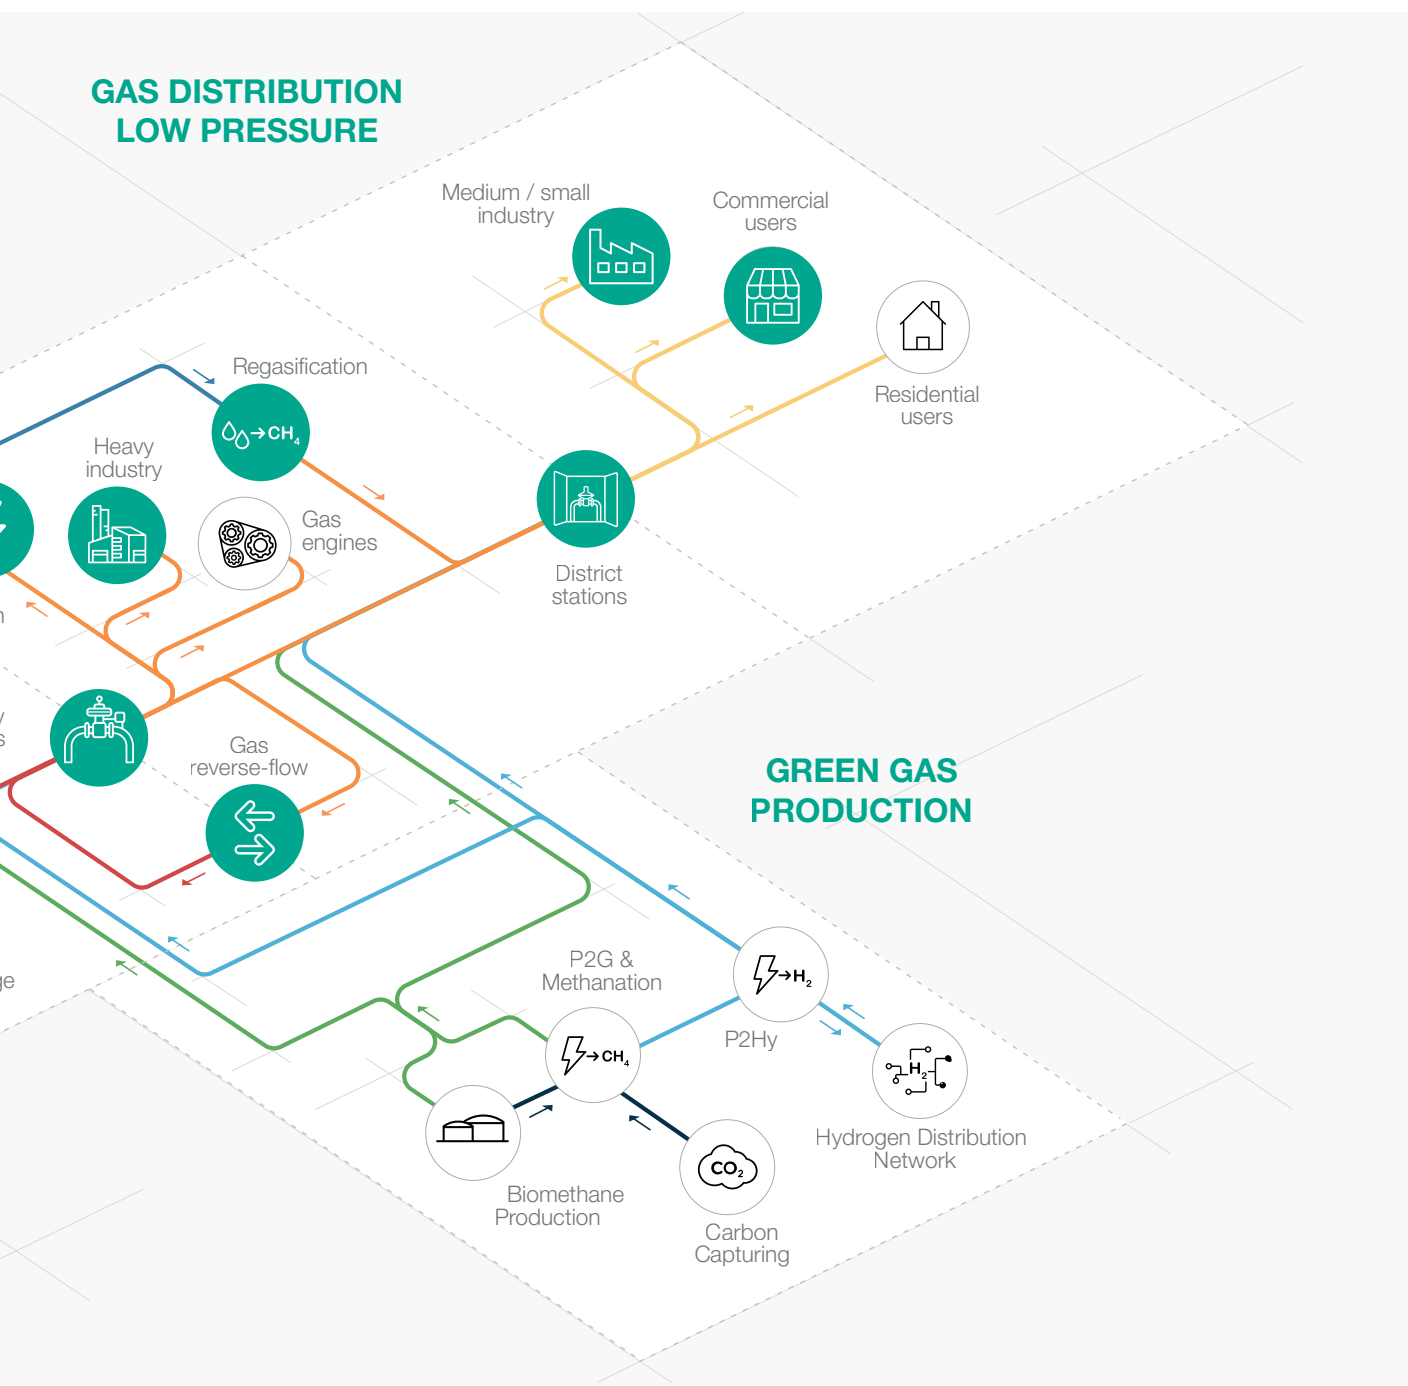


Figure 1 Area of application map

Introduction

SBC 782 is a safety device, also called slam shut valve, suitable to quickly interrupt the gas flow when the pressure reaches a calibration set value.

This device is mainly used in high-pressure transmission systems and in medium pressure gas distribution networks.

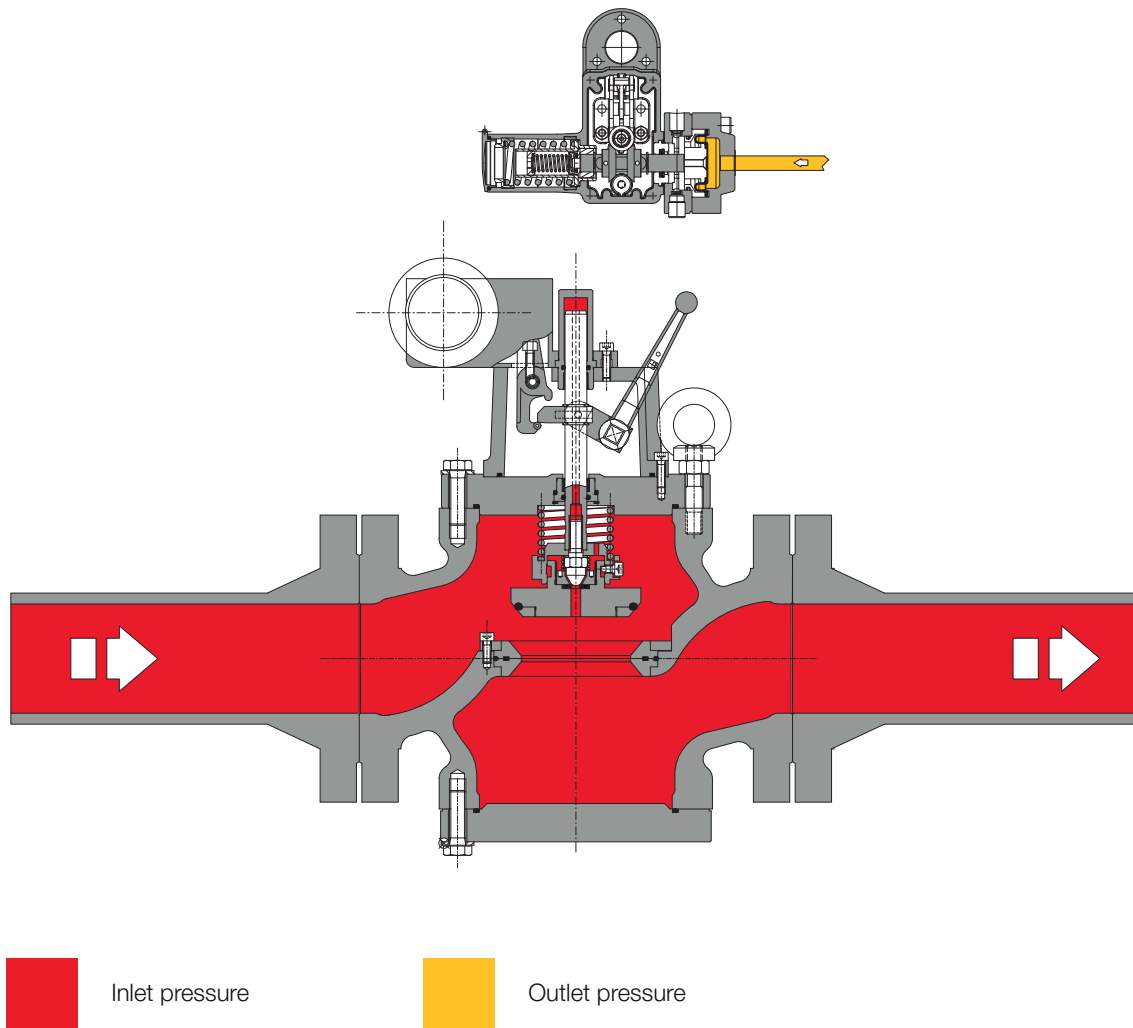


Figure 2 SBC 782

Features

A key feature of a slam shut valves is to be **extremely fast in response time**, ensuring the tripping within 1 second. Set point adjustment of the slam shut is operated via a pressostatic device which is sensing the downstream pressure.

The tripping of the slam-shut device, besides occurring **automatically** when the predetermined set-point is exceeded.

It can also be enabled locally, by pressing the suitable button available on the pressure switch, or remotely, as a result of the monitoring of the system or network on which the slam-shut device is installed.

As a result of the tripping of the slam-shut valve, the subsequent restoration of the normal operating condition, also called **RESET** operation, is carried out in a **purely manual manner**, after having verified and solved the causes that led to such a tripping.

This slam shut valve is suitable to be used with previously filtered, non corrosive gases, in natural gas transmission, power plants fuel gas skids and distribution networks as well as high load industrial application.

It is a **truly top entry design** which allows an **easy maintenance** of parts directly in the field **without removing the body from the pipework**.

The modular design of SB slam shut valve series allows its retrofitting on existing pressure regulators in the field without piping modifications.




Figure 3 SBC 782

SBC 782 competitive advantages



Over Pressure Shut-Off



Under Pressure Shut-Off



Internal by-pass



Push button for tripping test



Top Entry



Compact dimensions



Easy maintenance



Remote tripping option



Limit switch option



Biomethane compatible and available with specific versions for full Hydrogen or blending

Features

Features	Values		
Design pressure*	up to 10.3 MPa up to 1500 psig		
Ambient temperature*	Standard version from -10 °C to +70 °C from +14 °F to +158 °F	Arctic version from -40 °C to +65 °C from -40 °F to +150 °F	High temperature version (only DN 25 1" - DN 50 2") from -10 °C to +80 °C from +14 °F to +176 °F
Inlet gas temperature range*	Standard version from -10 °C to +70 °C from +14 °F to +158 °F	Arctic version from -20 °C to +60 °C from -4 °F to +140 °F	High temperature version (only DN 25 1" - DN 50 2") from -10 °C to +80 °C from +14 °F to +176 °F
Available Accessories	Limit switch, remote tripping		
Maximum inlet pressure	10.2 MPa (for CE marked product it is limited to 10.0 MPa) 1480 psig (for CE marked product it is limited to 1450 psig)		
Accuracy class	up to 2.5% gauge for OPSO (depending on working conditions) up to 2.5% gauge for UPSO (depending on working conditions)		
Over pressure setting range (OPSO)	from 2 KPa to 9 MPa from 0.29 to 1480 psig		
Under pressure setting range (UPSO)	from 1 KPa to 9 MPa from 0.14 to 1480 psig		
Nominal dimensions DN	DN 25 / 1"; DN 50 / 2"; DN 80 / 3"; DN 100 / 4"; DN 150 / 6"; DN 200 / 8"; DN 250 / 10"		
Connections*	Class 150/300/600 RF / RTJ according to ASME B 16.5 or PN 16/25/40 according to EN 1092-1		
End to end dimensions	according to EN 334, EN 14382, ASME B16.10		
(*) REMARK: Different functional features and/or extended temperature ranges available on request. Stated temperature ranges are the maximum for which the equipment's full performance, including accuracy, are fulfilled. Standard product may have a narrower range.			

Table 1 Features

Materials and Approvals

Part	Material
Body	Cast steel ASTM A 352 LCC for class ANSI 600 and 300 Cast steel ASTM A 216 WCB for class ANSI 150 and PN 16
Stem	AISI 416 stainless steel
Plug	Stainless steel
Valve seat	Stainless steel
Sealing ring	Nitrile rubber
Compression fittings	According to DIN 2353 in zinc-plated carbon steel
REMARK: The materials indicated above refer to the standard models. Different materials can be provided according to specific needs.	

Table 2 Materials

Construction Standards and Approvals

SBC 782 slam shut valve is designed according to the European standard EN 14382.

The product is certified according to European Directive 2014/68/EU (PED).

Leakage class: bubble tight, better than VIII according to ANSI/FCI 70-3.



EN 14382



PED-CE



Pressure switch models and ranges

Pressure switch types and ranges					
SSV Type	Model	Operation	Range Wh		Spring Table web link
			kPa	psig	
SB/82	101M	OPSO	2 - 100	0.29 - 14.5	TT 1331
		UPSO	1 - 26	0.14 - 3.77	
SSV Type	Model	Operation	Range Wh		Spring Table web link
			MPa	psig	
SB/82	102M	OPSO	0.02 - 0.55	2.9 - 79.8	TT 1331
		UPSO	0.02 - 0.28	2.9 - 40.6	
SB/82	102MH	OPSO	0.02 - 0.55	2.9 - 79.8	TT 1331
		UPSO	0.28 - 0.55	40.6 - 79.8	
SB/82	103M	OPSO	0.2 - 2.2	29.0 - 319.1	TT 1331
		UPSO	0.02 - 0.8	2.9 - 116.0	
SB/82	103MH	OPSO	0.2 - 2.2	29.0 - 319.1	TT 1331
		UPSO	0.8 - 1.9	116.0 - 275.6	
SB/82	104M	OPSO	1.5 - 4.5	217.6 - 652.7	TT 1331
		UPSO	0.16 - 1.8	23.2 - 216.1	
SB/82	104MH	OPSO	1.5 - 4.5	217.6 - 652.7	TT 1331
		UPSO	1.8 - 4.1	216.1 - 594.7	
SB/82	105M	OPSO	3 - 9	435.1 - 1305	TT 1331
		UPSO	0.3 - 4.4	43.5 - 638.2	
SB/82	105MH	OPSO	3 - 9	435.1 - 1305	TT 1331
		UPSO	4.4 - 9	638.2 - 1305	

Table 3 Settings table



General link to the calibration tables: [PRESS HERE](#) or use the QR code:

Mod. 102M/102MH - Max pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2701260	White	3.5	60	35	2.2	14.4
US2701530	Yellow	4	60	35	8.1	28.3
US2701790	Yellow/Black	4.5	60	35	14.5	47.9
US2702280	White/Red	5.5	60	35	27.6	97.2

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 4 TT 1331 - Mod. 102M/102MH - Max pressure setting springs

Mod. 102M - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700513	Red	2	40	15	0.7	3.6
US2700713	Green	2.3	40	15	2.2	7.7
US2700750	Black	2.5	40	15	3.8	19.6
US2700985	Brown	3	40	15	8.7	40.6

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 5 TT 1331 - Mod. 102M - Min pressure setting springs

Mod. 102MH - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700985	Brown	3	40	15	40.6	65.3
US2700980	Blue	3	35	15		
US2700985	Brown	3	40	15	58.0	79.8
US2700986	Brown	3	40	15		

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 6 TT 1331 - Mod. 102MH - Min pressure setting springs

Mod. 103M/103MH - Max pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2701530	Yellow	4	60	35	26.1	65.3
US2701790	Yellow/Black	4.5	60	35	40.6	116.0
US2702280	White/Red	5.5	60	35	95.7	224.8
US2702450	Red	6	60	35	174.0	333.6

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 7 TT 1331 - Mod. 103M/103MH - Max pressure setting springs

Slam shut valves



Mod. 103M - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700464	Orange	1.7	40	15	2.2	9.4
US2700513	Red	2	40	15	4.4	13.8
US2700713	Green	2.3	40	15	8.7	26.1
US2700750	Black	2.5	40	15	23.2	60.9
US2700985	Brown	3	40	15	56.6	116.0

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 8 TT 1331 - Mod. 103M - Min pressure setting springs

Mod. 103MH - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700985	Brown	3	40	15	116.0	188.5
US2700980	Blue	3	35	15		
US2700985	Brown	3	40	15	188.5	275.6
US2700986	Brown	3	40	15		

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 11 TT 1331 - Mod. 103MH - Min pressure setting springs

Mod. 104M/104MH - Max pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2702280	White/Red	5.5	60	35	203.0	478.6
US2702450	Red	6	60	35	348.1	696.2

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 9 TT 1331 - Mod. 104M/104MH - Max pressure setting springs

Mod. 104M - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700713	Green	2.3	40	15	20.3	50.8
US2700750	Black	2.5	40	15	36.3	123.3
US2700985	Brown	3	40	15	116.0	275.6

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 10 TT 1331 - Mod. 104M - Min pressure setting springs

Mod. 104MH - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700985	Brown	3	40	15	261.1	435.1
US2700980	Blue	3	35	15		
US2700985	Brown	3	40	15	435.1	594.6
US2700985	Brown	3	40	15		

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 15 TT 1331 - Mod. 104MH - Min pressure setting springs

Mod. 105M/105MH - Max pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2702280	White/Red	5.5	60	35	391.6	1015.2
US2702450	Red	6	60	35	812.2	1450.3

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 12 TT 1331 - Mod. 105M/105MH - Max pressure setting springs

Mod. 105M - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700713	Green	2.3	40	15	29.0	123.3
US2700750	Black	2.5	40	15	58.0	275.6
US2700985	Brown	3	40	15	116.0	638.1

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 13 TT 1331 - Mod. 105M - Min pressure setting springs

Mod. 105MH - Min pressure

Spring part number	Spring color	d	Lo	De	Spring range (psig)	
					Min.	Max.
US2700985	Brown	3	40	15	638.1	870.2
US2700980	Blue	3	35	15		
US2700985	Brown	3	40	15	870.2	1305.3
US2700985	Brown	3	40	15		

d = Wire Diameter (mm) **Lo** = Spring Length (mm) **De** = External Diameter (mm)

Table 14 TT 1331 - Mod. 105MH - Min pressure setting springs

Accessories

- Limit switches
- Remote tripping

In-line Installation

The following example is provided as a recommendation to get the best performance from the slam shut valves SBC 782.

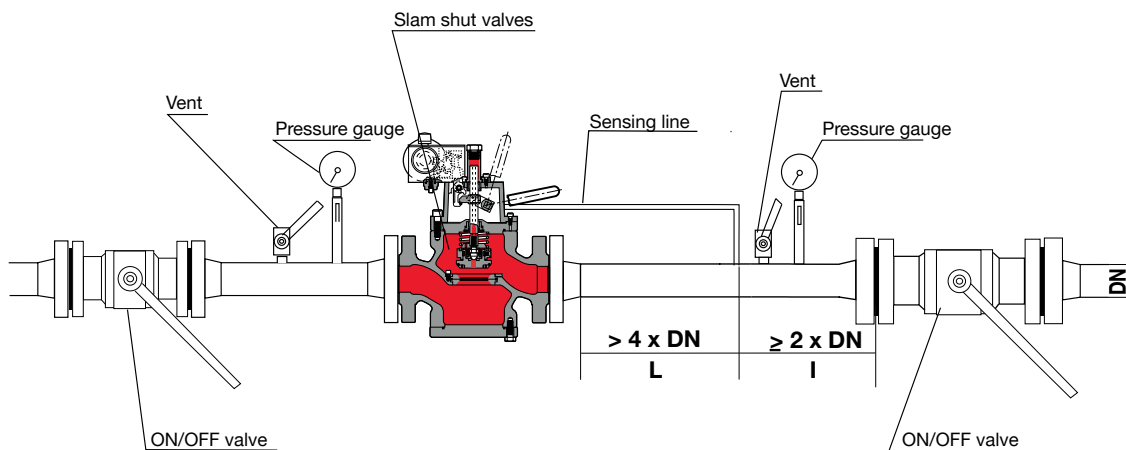


Figure 4 SBC 782 inline installation


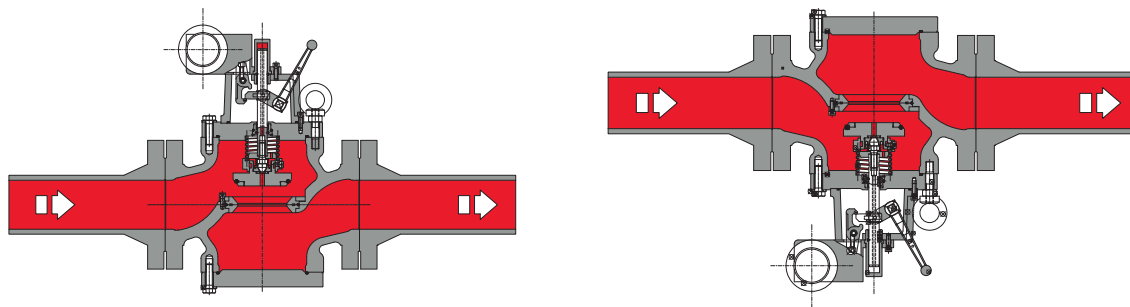


Figure 5 SBC 782 recommended installations



Weights and Dimensions

SBC 782

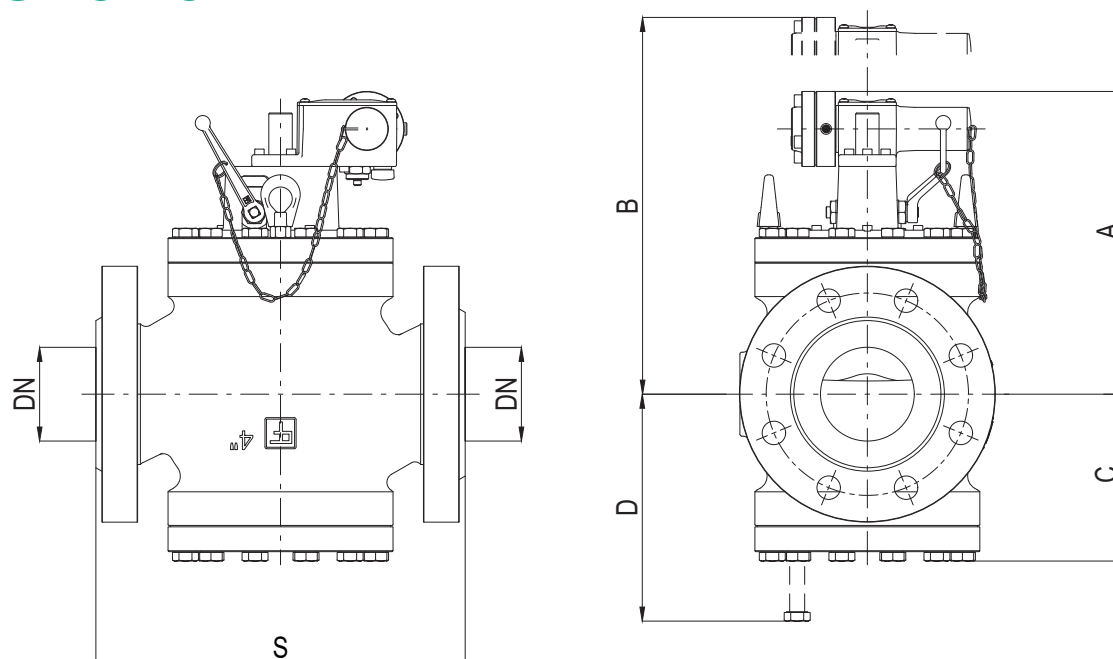


Figure 6 SBC 782 dimensions

Weights and Dimensions (for other connections please contact your closest Pietro Fiorentini representative)																
Size (DN) - [mm]	25		50		65		80		100		150		200		250	
Size (DN) - inches	1"		2"		2 1/2"		3"		4"		6"		8"		10"	
	[mm]	inches	[mm]	inches	[mm]	inches	[mm]	inches	[mm]	inches	[mm]	inches	[mm]	inches	[mm]	inches
S - ANSI 150/PN16	183	7.21"	254	10"	277	10.9"	298	1.75"	352	13.88"	451	17.75"	543	21.38"	673	26.50"
S - ANSI 300	197	7.75"	267	0.52"	-	-	317	2.48"	368	14.49"	473	18.62"	568	22.38"	708	27.88"
S - ANSI 600	210	8.25"	286	1.25"	-	-	336	3.25"	394	15.52"	508	20.00"	609	23.98"	752	29.62"
A	215	8.5"	240	9.4"	270	10.6"	315	12.4"	300	11.8"	375	14.8"	450	17.7"	530	20.9"
B	280	11.0"	330	13.0"	380	15.0"	425	16.7"	440	17.3"	560	22.0"	625	24.6"	730	28.7"
C	100	3.9"	130	5.1"	140	5.5"	150	5.9"	190	7.5"	225	8.9"	265	10.4"	340	13.4"
D	130	5.1"	160	6.3"	180	7.1"	200	7.9"	250	9.8"	275	10.8"	320	12.6"	440	17.3"
Tubing Connections	1/4" NPT															
Weight	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs	Kg	lbs
ANSI 150/PN16	21	46	37	82	45	99	51	112	79	174	154	340	255	562	430	948
ANSI 300	22	49	40	88	48	106	54	119	95	209	190	419	290	639	577	1272
ANSI 600	23	51	42	93	51	112	57	126	100	220	210	463	335	739	577	1272

Table 16 Weights and dimensions



Sizing and Cg

In general, the choice of a slam-shut valve is made of several factors, but primarily by the differential pressure drop generated downstream and the energy generated by the gas flow on the internal mechanism. For this purpose Pietro Fiorentini has developed a specific online tool for slam-shut valve sizing following the calculation guidelines available from EN14382 standard.

For sizing [PRESS HERE](#) or use the QR code:



Note: In case you do not have the proper credentials to access, feel free to contact your closest Pietro Fiorentini representative.

Customer Centricity

Customer centricity is a way of running your business — implementing a perfect customer experience at each stage of the pipeline. Pietro Fiorentini is one of the main Italian international company with high focus on product and service quality.

The main strategy is to create a stable, long-term relationship, putting the customer's needs first. Lean management and customer centricity are used to improve and maintain the highest level of customer experience.



Support

Pietro Fiorentini's top priority is to provide support to the client in all phases of project development, during installation, start up and operation. Pietro Fiorentini has developed a highly standardized Intervention-Management-System (IMS), which helps to facilitate the entire process and putting the customer at the forefront of every decision in our process while manufacturing or developing a product to help improve the product and service. With our IMS business model many services are available remotely, avoiding long waiting times, improving service, and avoiding unnecessary expenses.



Training

Pietro Fiorentini offers training services available for both experienced operators and new customers. The training is offered for all levels of our customers which can include one or all of the following: sizing of equipment, application, installation, operation, maintenance and is prepared according to the level of use and the customer's need.



Customer Relation Management (CRM)

The service and care of our customers are one of the main missions and vision of Pietro Fiorentini. For this reason, Pietro Fiorentini has enhanced the customer relation management system. This enables us to track every opportunity and request from our customers into one single information point and allows us to coordinate information allowing us to give the customer improved service.



Sustainability

Here at Pietro Fiorentini, we believe in a world capable of improvement through technology and solutions that can shape a more sustainable future. That is why respect for people, society and the environment form the cornerstones of our strategy.



Our commitment to the world of tomorrow

While in the past we limited ourselves to providing products, systems and services for the oil & gas sector, today we want to broaden our horizons and create technologies and solutions for a digital and sustainable world. We have a particular focus on renewable energy projects to help make the most of our planet's resources and create a future in which the younger generations can grow and prosper.

The time has come to understand how and why we operate now.





Pietro Fiorentini

TB0041USA



The data is not binding. We reserve the right
to make changes without prior notice.

sbc782_technicalbrochure_USA_revB

www.fiorentini-usa.com